

## Ultra-Compact Rugged HD Monitor

### FEATURES

- ✓ High definition 1080P LED screen
- ✓ Connections on top for easy access
- ✓ Built-in rechargeable battery plus A/C adapter provided
- ✓ Ruggedized for field use
- ✓ Two-click Input selection
- ✓ Custom carrying case
- ✓ Includes stand

#### Screen Cleaning & General Care

Do not use solvents when cleaning the screen as they may cause damage; clean with a soft cloth. Do not expose the Monitor to wet/damp/humid, dusty, or excessively hot or cold environments, or leave it in direct sunlight. Make sure all connections are free of dirt and debris at all times. Do not block vents. Only use the supplied power supply. Turn power off when not in use.

\* The HDCM-2 will not work directly connected to HD Analog Cameras or anything that uses proprietary encoding.

### QUICK START GUIDE

#### Purpose

This is a multi-purpose ruggedized HD LED monitor. It can be used for temporary or permanent connection to any NVR, DVR, Cable/Satellite box, computer, or other video source that has an HDMI, AV, VGA, or BNC connection.\*

#### How to display video

Plug the AC adapter into a wall outlet, and then connect it to the HDCM-2. The HDCM-2 will automatically turn the screen on and attempt to show video. Next, connect your video source to the appropriate connection on the top of the HDCM-2. If you see a "No Signal" message on the screen, press the Input Selector button on the top to access that menu, then press it again to scroll through the AV, BNC, HDMI, and VGA options. Once you have highlighted the connection type you are using, press one of the Arrow buttons to select it. Your video should now display.


#### Adjusting brightness, contrast, etc.

Press the Screen Controls Menu button to access the menu. There will be four primary icons on the top row—a Color Wheel icon, a Speaker icon, a Screen Shift icon, and an Advanced Settings icon (the one with the clock). Use the Left and Right Arrow buttons to highlight/select one of the menus. Then use the Input Selector button to scroll down the list of Settings. When you have highlighted the setting you want to adjust, use the Arrow buttons to make the change. Once you have made the change, select the Screen Controls button again to save it.

#### IMPORTANT NOTE ABOUT POWER & CHARGING THE BATTERY

There is a built-in rechargeable battery. Therefore, leaving the Battery Engage/Disengage Switch in the ON position will drain the battery even when the screen is not On. Be sure to turn off the Battery Engage/Disengage Switch during transport or when the HDCM-2 is not in use. Always use the AC power adapter if you set up the HDCM-2 in a permanent location, or plan to run it continuously for more than an hour.

To charge the battery, plug in the AC adapter and turn the Battery Engage/Disengage Switch to the ON position.

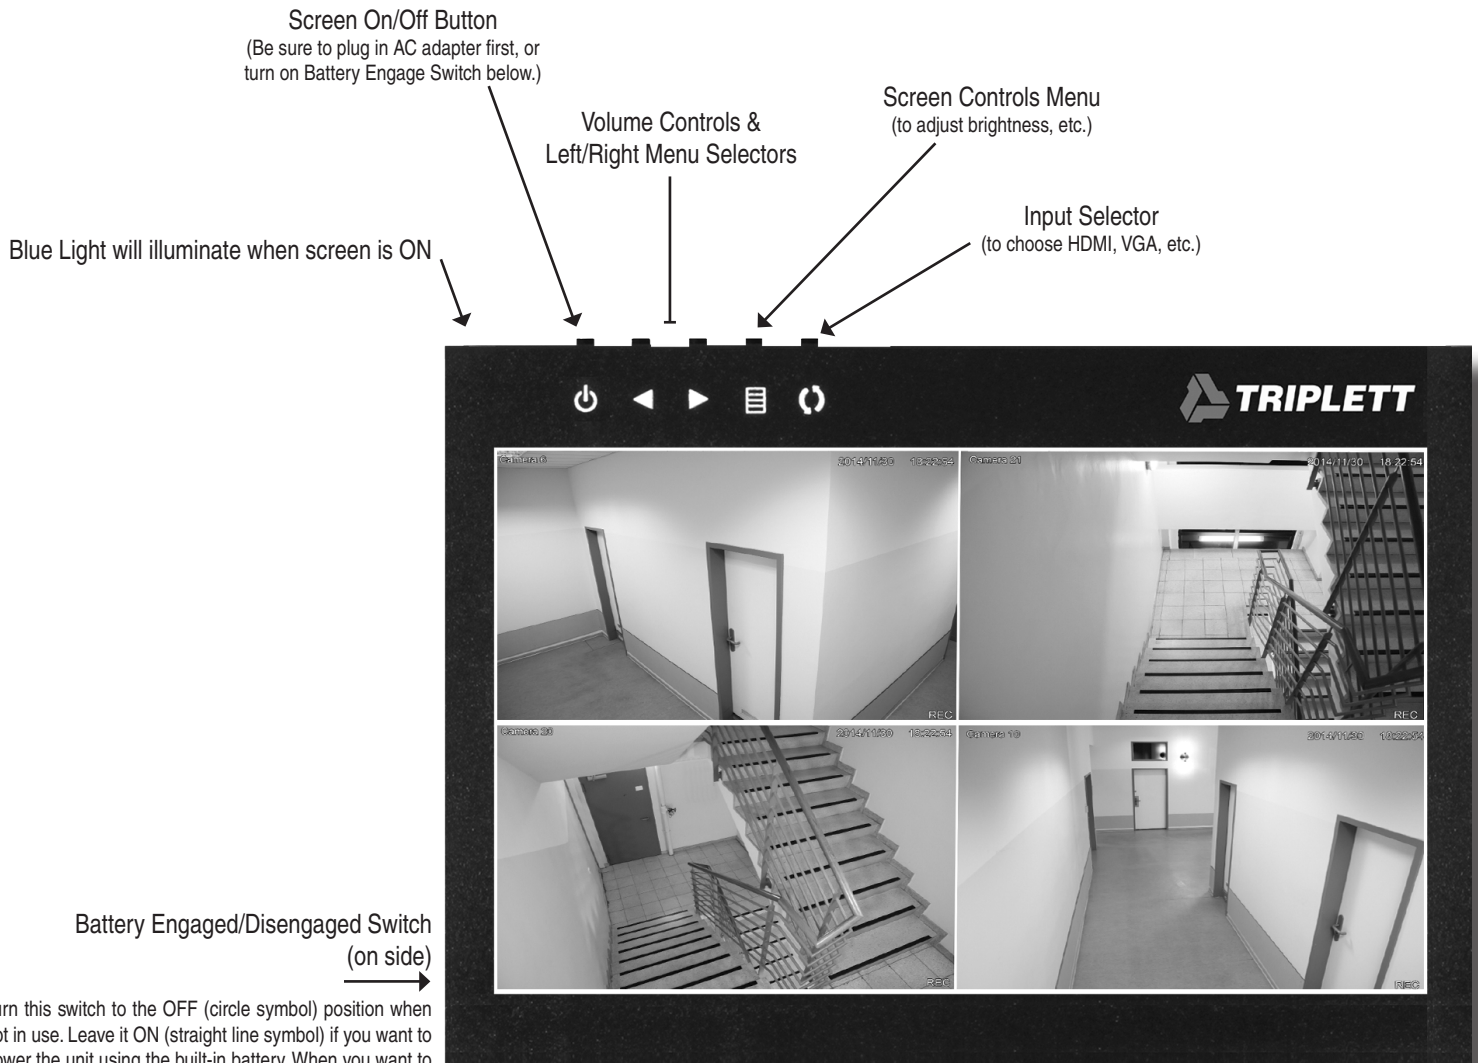

## WARRANTY AND TECHNICAL SUPPORT

Triplett / Jewell Instruments extends the following warranty to the original purchaser of these goods for use. Triplett warrants to the original purchaser for use that the products sold by it will be free from defects in workmanship and material for a period of (3) three years from the date of purchase.

This warranty does not apply to any of our products which have been repaired or altered by unauthorized persons in any way or purchased from unauthorized distributors so as, in our sole judgment, to injure their stability or reliability, or which have been subject to misuse, abuse, misapplication, negligence, accident or which have had the serial numbers altered, defaced, or removed. Accessories, including batteries and fuses, are not covered by this warranty.

To register a claim under the provisions of this warranty, please contact the distributor from which you purchased the product from for warranty consideration.

ALL WARRANTIES IMPLIED BY LAW ARE HEREBY LIMITED TO A PERIOD OF THREE YEARS FROM DATE OF PURCHASE, AND THE PROVISIONS OF THE WARRANTY ARE EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES EXPRESSED OR IMPLIED.

The purchaser agrees to assume all liability for any damages and bodily injury which may result from the use or misuse of the product by the purchaser, his employees, or others, and the remedies provided for in this warranty are expressly in lieu of any other liability Triplett may have, including incidental or consequential damages.

Some states (USA ONLY) do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. No representative of Triplett / Byte Brothers or any other person is authorized to extend the liability of Triplett in connection with the sale of its products beyond the terms hereof.

Triplett reserves the right to discontinue models at any time, or change specifications, price or design, without notice and without incurring any obligation.

This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

Contact Information:  
Phone: 1-800 Triplett  
Email: [Support@triplett.com](mailto:Support@triplett.com)  
Register your Tester at [Triplett.com](http://Triplett.com)

## SPECIFICATIONS

Model	HDCM
Display Area	4:3 LED HD Digital Panel
Native Resolution	1024 x 768 (HDMI is 1080P)
Contrast	400:1
Brightness	400cd/m2
Response Time	< = 12ms
Visual Angle	160 degrees (vertical) x 160 degrees (horizontal)
Frequency	60-75 Hz
Signal Input	AV / BNC / VGA / HDMI
Backlight	LED
Analog Interface	PAL/NTSC
Speaker	Built-in
Operating Temperature	-10 degrees Celsius to 50 degrees Celsius
Language	English, Russian, Chinese
Battery	Lithium Polymer (3 cell) 11.1V 1000mAH
Charger	12.6V DC 2A