



14AWG 2 CONDUCTOR HIGH STRAND AUDIO (41 STRAND)


SKU: 209-2322

DESCRIPTION

14AWG, 2 Conductor, High Strand Audio (41 Strand), PVC Jacket, 500ft Pull Box or 1000ft Spool.

APPLICATION

- Intercom Systems
- Sound / Audio
- Indoor Applications
- ETL Listed, RoHS Compliant

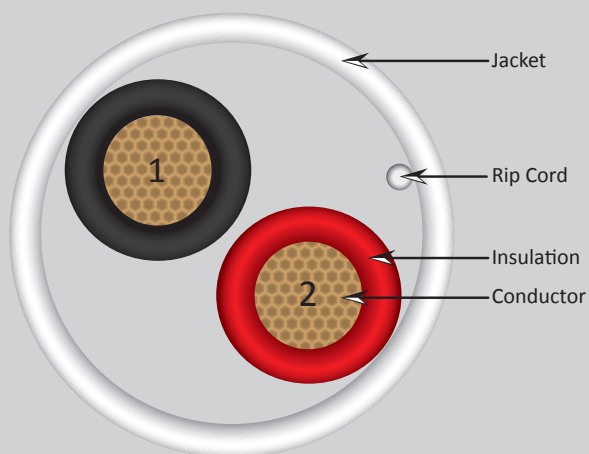

Conductor

Material	2 Core (Stranded BC)
Size	Oxygen Free Copper Wire Strands
Stranding	14 AWG
Strand Diameter	41 Strand
	0.254 mm

Insulation

Material	PVC
Average Thickness	0.36 mm
Min. Point Thickness	0.33 mm
Diameter (±0.05mm)	2.60 mm

Assembly Diameter (±0.1mm) 5.20

Jacket

Material	PVC
Color	White
Average Thickness	0.60 mm
Min. Point Thickness	0.54 mm
Outer Diameter (±0.1mm)	6.40 mm
Insulation Color	Black, Red

Ripcord

Material	Nylon (150D)
----------	--------------

Electrical Performance

Rated Temperature (°C)	75
Voltage Rating	300V
Reference Standard	ETL, CMR, CL3

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥13.8
Aging Elongation (%)	≥100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
Aging Elongation (%)	≥50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus AUDIO CABLE 14 AWG 2 COND 41 STRANDED
OXYGEN FREE CMR FT4 CL3 RoHS XXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 08/2015

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.