


Serial number	type	explain	approval	Date

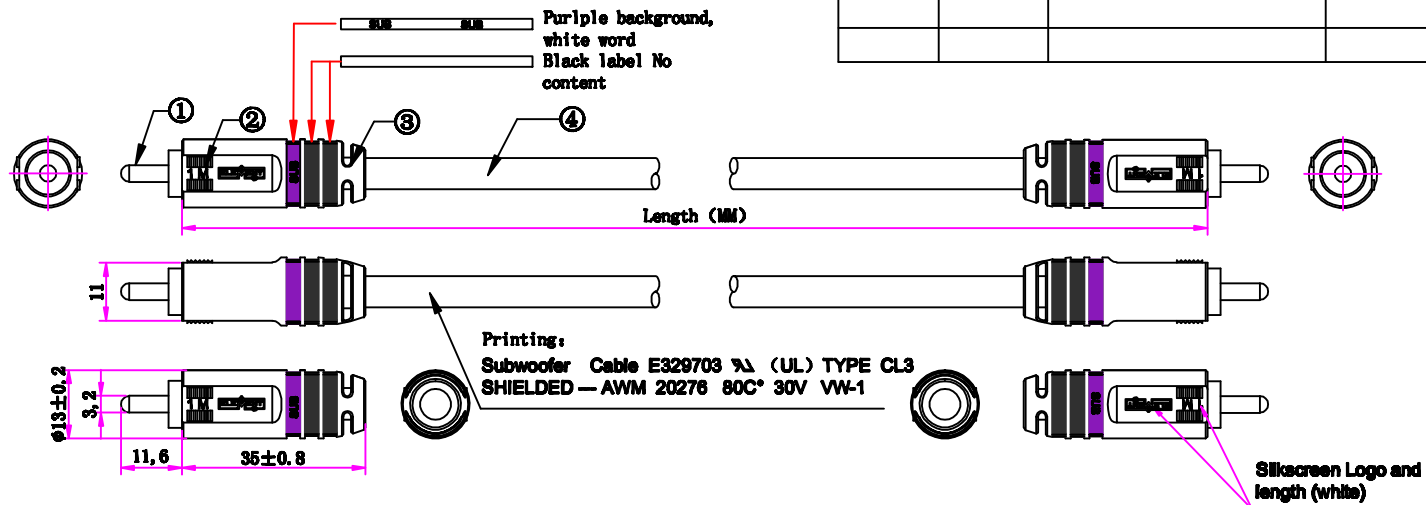


Item No.	Description	Length(mm)	First molding color ②	silkscreen
ELE10001M	RCA Male to Male	1000±20	45P PVC molding (Gray) PANTONE Cool GRAY 3 PC (0,0,0,17)	1M
ELE10002M	RCA Male to Male	2000±30	45P PVC molding (Red) PANTONE 1805 PC (0,91,100,23)	2M
ELE10003M	RCA Male to Male	3000±30	45P PVC molding (Blue) PANTONE 288 PC (100,67,0,23)	3M
ELE10004M	RCA Male to Male	4000±30	45P PVC molding (Green) PANTONE 370 PC (56,0,100,27)	4M
ELE10006M	RCA Male to Male	6000±40	45P PVC molding (Orange) PANTONE 1525PC (0,58,100,10)	6M
ELE10010M	RCA Male to Male	10000±40	45P PVC molding (Purple) PANTONE 520 PC (84,100,12,0)	10M

Note:

1.Test condition: Voltage withstand 500v;
Insulation Resistance:5M Ω; conductor
Resistance:10Ω 100% pass.

2.All parts are compliant to RoHS cable
spec.

no.	Q'ty	Unit	name	remark
①	2	PCS	Connector	Gold plated RCA Male
③	2	PCS	outer molding	60P Black PVC
④	1	PCS	cable spec	Black cable, OD: 7.0MM (28/0.12BC +PVC/TD2.0MM)+42SP/0.12BC+PVC/ TD: 4.0MM+A1+128H/0.12BC+PVC)*1C

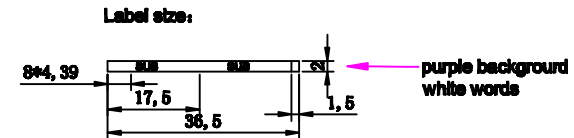

CABLE SPECIFICATION

	ITEM	SPEC
CENTER CONDUCTOR	MATERIAL	BAARE COPPER WIRE
	CONSTRUCT	MM/NO. 0.12mm/28C
	O.D.	MM 0.12
INSIDE INSULATION	MATERIAL	PVC
	O.D	MM 2.0mm
	COLOR	WHITE
DRAIN SHIELD	MATERIAL	BAARE COPPER WIRE
	TYPE	CONVOLVED
	CONSTRUCT	MM/NO. 0.12MM/42SP
INSIDE INSULATION	MATERIAL	PVC
	O.D	MM 4.0mm
	COLOR	BLACK
DRAIN SHIELD	MATERIAL	BAARE COPPER WIRE
	TYPE	BRAID
	CONSTRUCT	MM/NO. Aluminum foil (AL) +0.12MM/128H
PVC JACKET	MATERIA	PVC
	O.D	MM 7.0MM
	COLOR	BLACK

	Scale	1:1	Unit	mm			Drawing		Approved		Checked	
						Drawing No.	US002-BHD004		REV	A1	Date	2012-05-11