


WIRING INSTRUCTIONS

Detach the phoenix connector from the back of the volume control. Attach the speaker wires to the connector block following the diagram below. Be sure to follow the polarity when connecting the wires. Your 70V speaker should be connected to the +OUT and -OUT terminals. Your amp should be connected to the +IN and -IN terminals. Each terminal will hold up to 16AWG stranded wire. For larger wiring or residential applications, a small length of wire and a wire nut are recommended.

Once the proper wiring is inserted into each terminal, use a Phillips head screwdriver to secure the wires in place. After all the wires are secured, restore the phoenix connector to the appropriate position on the back of the volume control.

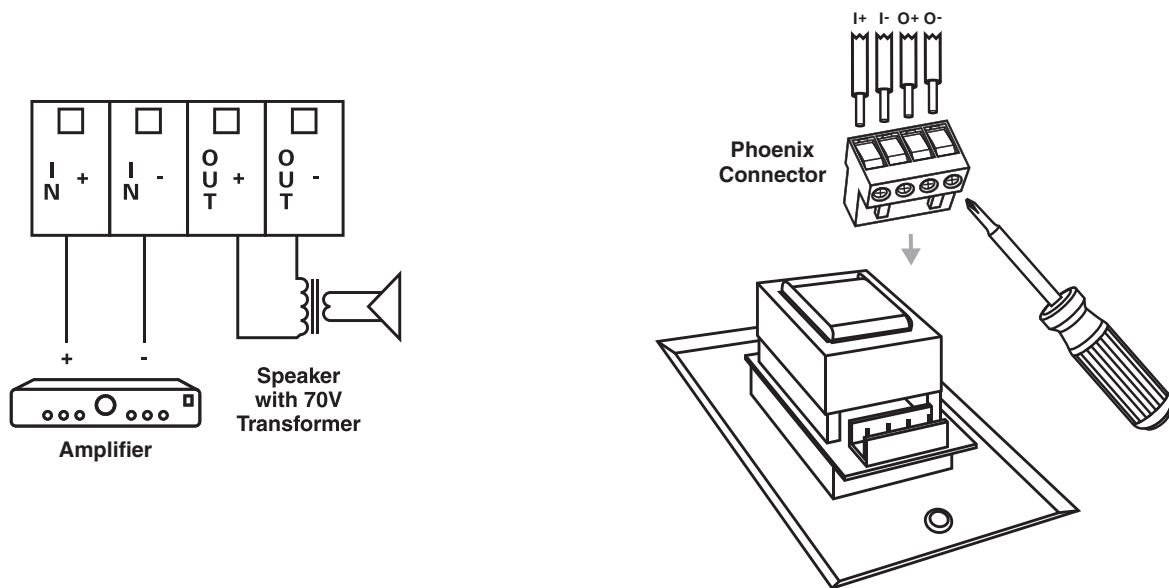

INSTALLATION MEASUREMENTS

Use the chart below to find the appropriate cut-out dimensions and depth requirements for your volume control.

Model	A	B	C
SAG0240	2 $\frac{1}{8}$ " (54mm)	2 $\frac{3}{4}$ " (70mm)	1 $\frac{3}{4}$ " (45mm)
SAG0241	2 $\frac{1}{8}$ " (54mm)	2 $\frac{3}{4}$ " (70mm)	1 $\frac{3}{4}$ " (45mm)
SAG0242	2 $\frac{1}{2}$ " (64mm)	2 $\frac{3}{4}$ " (70mm)	1 $\frac{3}{4}$ " (45mm)

