Serial number	type	explain	approval	Date

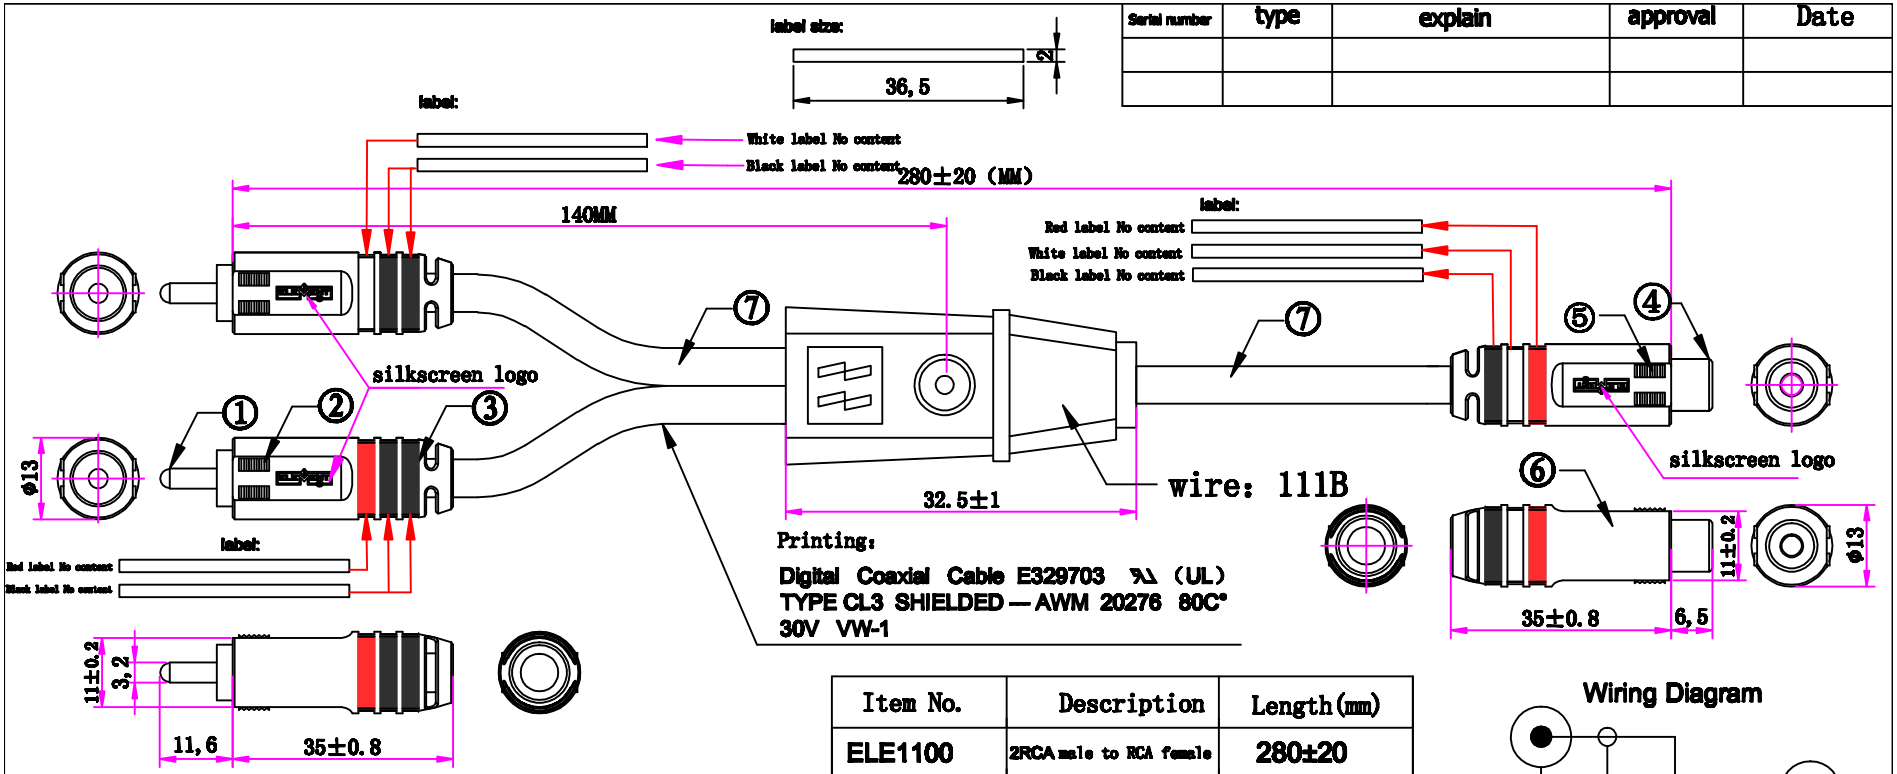

Item No.	Description	Length(mm)
ELE1100	2RCA male to RCA female	280±20

Wiring Diagram



No.	Q'ty	Unit	parts	Remark
①	2	PCS	Connector	RCA male, gold plated
②	2	PCS	First molding	45P PVC molding (black)
③	2	PCS	Outer molding	60P PVC molding (black)
④	1	PCS	Connector	Gold plated, RCA female
⑤	1	PCS	First molding	45P PVC molding (black)
⑥	1	PCS	Outer molding	60P PVC molding (black)
⑦	3	PCS	Cable spec	Black digital cableOD:6.0MM (17/0.12BC+PR/TD:3.6MM+AL+64#/0.11BC)*1C

CABLE SPECIFICATION

ITEM			SPEC
CENTER CONDUCTOR	MATERIAL		BAARE COPPER WIRE
	CONSTRUCT	MM/NO.	0.12mm/17C
	O.D.	MM	0.12
INSIDE INSULATION	MATERIAL		PE
	O.D	MM	3.6mm
	COLOR		WHITE
DRAIN SHIELD	MATERIAL		BAARE COPPER WIRE
	TYPE		BRAID
	CONSTRUCT	MM/NO.	Aluminum foil(AL)+0.11MM/64#
PVC JACKET	MATERIA		PVC
	O.D	MM	6.0MM
	COLOR		BLACK

Note:
1.Test condition: Voltage withstand 500v; Insulation Resistanec:5M Ω; conductor Resistance:10Ω 100% pass.
2.All parts are compliant to RoHS cable spec.

Scale	1:1	Unit	mm		Drawing		Approved		Checked	
				图纸编号	US002-BHD007	REV	A1	Date	2012-05-11	