

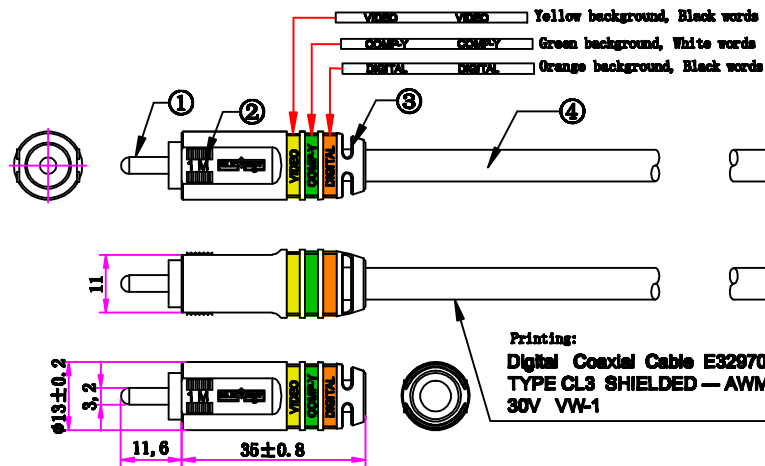


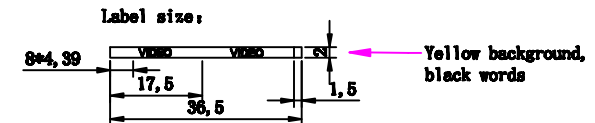

Serial number	type	explain	approval	Date

Item No.	Description	Length(mm)	First inolding color ②	silkscreen
ELE11001M	RCA Male to Male	1000±20	45P PVC molding (Gray) PANTONE Cool GRAY 3 PC (0,0,0,17)	1M
ELE11002M	RCA Male to Male	2000±30	45P PVC molding (Red) PANTONE 1805 PC (0,91,100,23)	2M
ELE11003M	RCA Male to Male	3000±30	45P PVC molding (Blue) PANTONE 288 PC (100,87,0,23)	3M
ELE11004M	RCA Male to Male	4000±30	45P PVC molding (Green) PANTONE 370 PC (58,0,100,27)	4M
ELE11008M	RCA Male to Male	6000±40	45P PVC molding (Orange) PANTONE 1525PC (0,58,100,10)	6M
ELE11010M	RCA Male to Male	10000±40	45P PVC molding (Purple) PANTONE 520 PC (84,100,12,0)	10M

Wiring Diagram



Note:
 1.Test condition: Voltage withstand 500v;
 Insulation Resistanec:5M Ω; conductor
 Resistance:10Ω 100% pass.
 2.All parts are compliant to RoHS cable
 spec.

no.	Qty	Unit	name	remark
①	2	PCS	Connector	Gold plated RCA Male
③	2	PCS	outer molding	60P Black PVC
④	1	PCS	cable spec	Black digital cable OD: 6.0MM (17/0.12BC+ PE/TD: 3.6MM+AL+64#(0.11BC)*1C

CABLE SPECIFICATION

	ITEM	SPEC
CENTER CONDUCTOR	MATERIAL	BAARE COPPER WIRE
	CONSTRUCT	MM/NO. 0.12mm/17C
	O.D.	MM 0.12
INSIDE INSULATION	MATERIAL	PE
	O.D	MM 3.6mm
	COLOR	WHITE
DRAIN SHIELD	MATERIAL	BAARE COPPER WIRE
	TYPE	BRAID
	CONSTRUCT	MM/NO. Aluminum foil (AL) +0.11MM/64#
PVC JACKET	MATERIA	PVC
	O.D	MM 6.0MM
	COLOR	BLACK

	Scale	1:1	Unit	mm			Drawing		Approved		Checked	
						Drawing No.	US002-BHD005		REV	A1	Date	2012-05-11