| Serial number | type | explain | approval | Date |
|---|---|---|---|---|
| | | | | |
| | | | | |

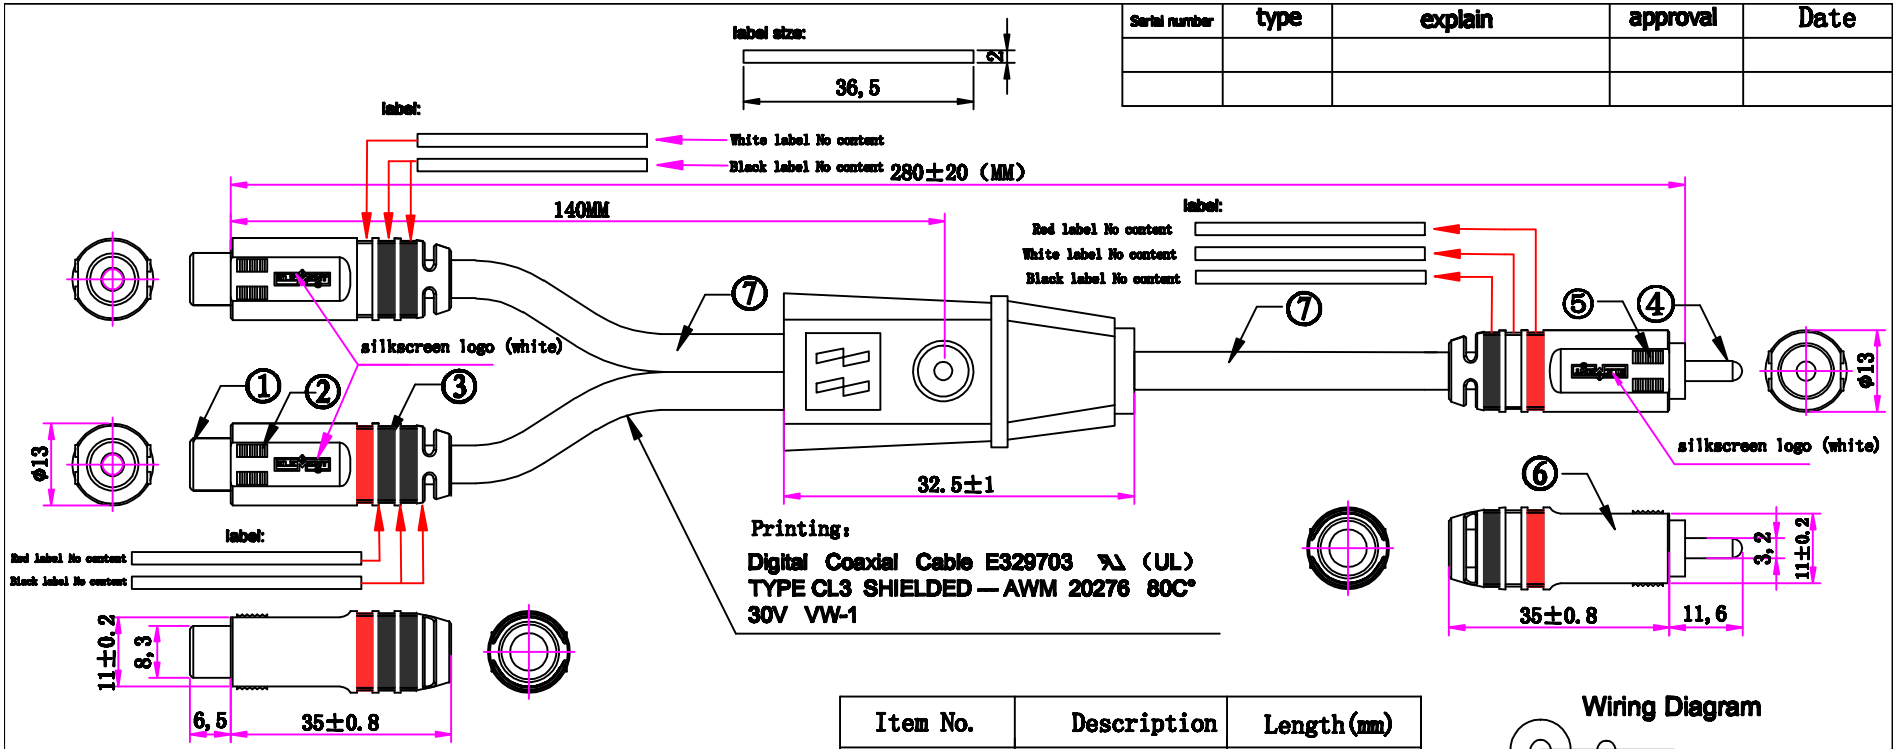


| Item No. | Description | Length(mm) |
|---|---|---|
| ELE1102 | 2RCA Female to RCA male | 280±20 |
| | | |

Wiring Diagram



| No. | Q'ty | Unit | parts | Remark |
|---|---|---|---|---|
| ① | 2 | PCS | Connector | RCA Female, gold plated |
| ② | 2 | PCS | First molding | 45P PVC molding (black) |
| ③ | 2 | PCS | Outer molding | 60P PVC molding (black) |
| ④ | 1 | PCS | Connector | Gold plated, RCA male |
| ⑤ | 1 | PCS | First molding | 45P PVC molding (black) |
| ⑥ | 1 | PCS | Outer molding | 60P PVC molding (black) |
| ⑦ | 3 | PCS | Cable spec | Black digital cableOD:6.0MM (17/0.12BC+PR/TD:3.6MM+AL+64#/0.11BC)*1C |

## CABLE SPECIFICATION

| ITEM | | | SPEC |
|---|---|---|---|
| CENTER CONDUCTOR | MATERIAL | | BAARE COPPER WIRE |
| | CONSTRUCT | MM/NO. | 0.12mm/17C |
| | O.D. | MM | 0.12 |
| INSIDE INSULATION | MATERIAL | | PE |
| | O.D | MM | 3.6mm |
| | COLOR | | WHITE |
| DRAIN SHIELD | MATERIAL | | BAARE COPPER WIRE |
| | TYPE | | BRAID |
| | CONSTRUCT | MM/NO. | Aluminum foil(AL)+0.11MM/64# |
| PVC JACKET | MATERIA | | PVC |
| | O.D | MM | 6.0MM |
| | COLOR | | BLACK |

Note:
1.Test condition: Voltage withstand 500v; Insulation Resistanec:5M Ω; conductor Resistance:10Ω 100% pass.
2.All parts are compliant to RoHS cable spec.

| Scale | 1:1 | Unit | mm | | Drawing | | Approved | | Checked | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Drawing No. | US002-BHD007 | | REV | A1 | Date | 2012-05-11 |