Serial number	type	explain	approval	Date

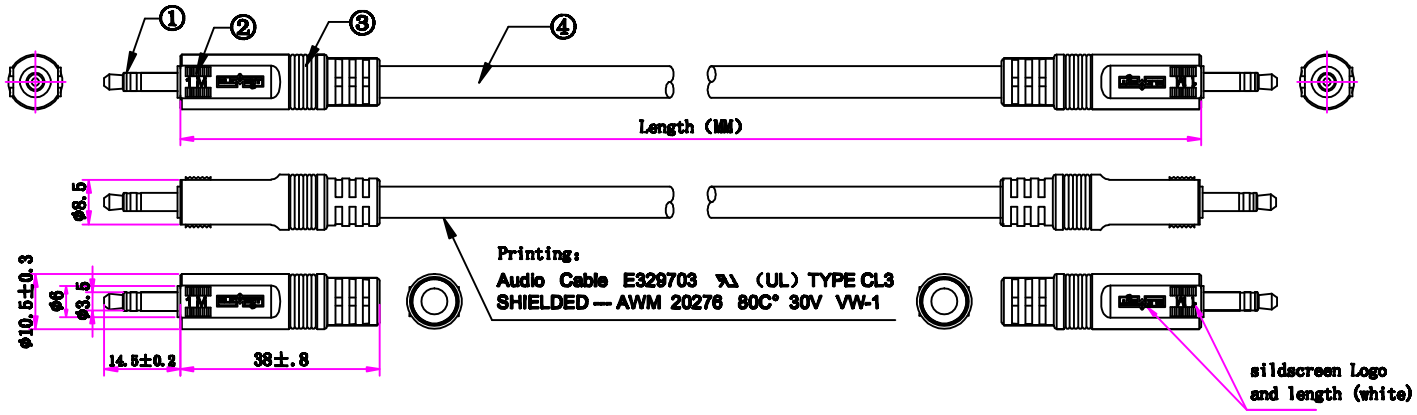



Item No.	Description	Length(mm)	First molding color ②	silkscreen
ELE12001M	3.5mm stereo Male to Male	1000±20	45P PVC molding (Gray) PANTONE Cool GRAY 3 PC (0,0,0,17)	1M
ELE12002M	3.5mm stereo Male to Male	2000±30	45P PVC molding (Red) PANTONE 1805 PC (0,91,100,23)	2M
ELE12003M	3.5mm stereo Male to Male	3000±30	45P PVC molding (Blue) PANTONE 288 PC (100,67,0,23)	3M
ELE12004M	3.5mm stereo Male to Male	4000±30	45P PVC molding (Green) PANTONE 370 PC (56,0,100,27)	4M
ELE12006M	3.5mm stereo Male to Male	6000±40	45P PVC molding (Orange) PANTONE 1525PC (0,58,100,10)	6M
ELE12010M	3.5mm stereo Male to Male	10000±40	45P PVC molding (Purple) PANTONE 520 PC (64,100,12,0)	10M

Note:
1.Test condition: Voltage withstand 500v; Insulation Resistanec:5M Ω; conductor Resistance:10Ω 100% pass.
2.All parts are compliant to RoHS cable spec.

No.	Q'ty	Unit	parts	remark
①	2	PCS	Connector	Gold 3.5mm stereo Male, 6.0 CL3level
③	2	PCS	outer molding	60P Black PVC
④	1	PCS	cable spec	Black cable OD:6.0MM {(10/0.12BC*1C+PVC/ID:1.2MM +26SP/0.11BC+PVC/ID:2.2MM) *2C+Cotton paper}*1C

CABLE SPECIFICATION

ITEM			SPEC
CENTER CONDUCTOR	MATERIAL		BARE COPPER WIRE
	CONSTRUCT	MM/NO.	0.12mm/10C
	O.D.	MM	0.12
INSIDE INSULATION	MATERIAL		PVC
	O.D	MM	1.2mm±0.1*2F
	COLOR		RED/WHITE
DRAIN SHIELD	MATERIAL		BARE COPPER WIRE
	TYPE		CONVOLVE
	CONSTRUCT	MM/NO.	0.11MM/26SP
OUTSIDE INSULATION	MATERIA		PVC
	O.D	MM	2.2MM±0.1*2F+ Cotton paper
	COLOR		RED/WHITE
PVC JACKET	MATERIA		PVC
	O.D	MM	6.0MM±0.1
	COLOR		BLACK

Scale	1:1	Unit	mm		Drawing		Approved		Checked	
				Drawing No.	US002-BHD008		REV	A1	Date	2012-05-11