Serial number	type	explain	approval	Date

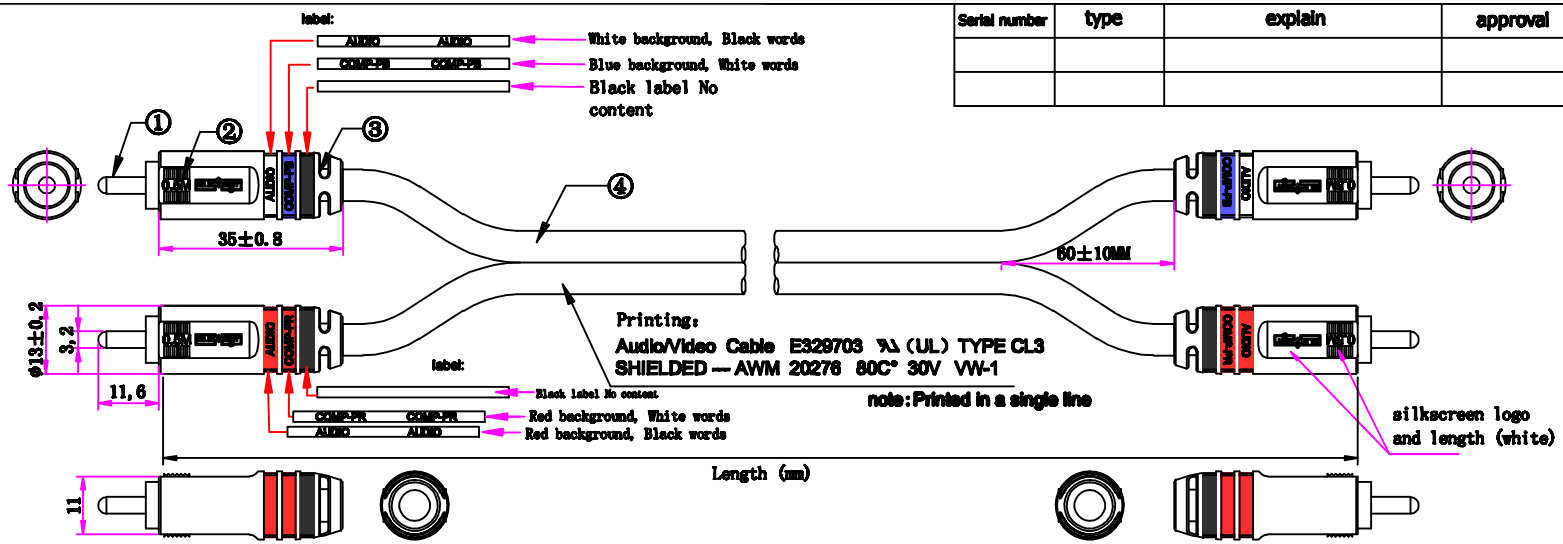

Item No.	Description	Length(mm)	First molding color ②	silkscreen
ELE14000M	2RCA Male to Male	500±20	45P PVC molding (Yellow) PANTONE 124 PC(0,26,100,6)	0.5M
ELE14001M	2RCA Male to Male	1000±20	45P PVC molding (Gray) PANTONE Cool GRAY 3 PC (0,0,0,17)	1M
ELE14002M	2RCA Male to Male	2000±30	45P PVC molding (Red) PANTONE 1805 PC (0,91,100,23)	2M
ELE14003M	2RCA Male to Male	3000±30	45P PVC molding (Blue) PANTONE 288 PC (100,67,0,23)	3M
ELE14004M	2RCA Male to Male	4000±30	45P PVC molding (Green) PANTONE 370 PC (56,0,100,27)	4M
ELE14006M	2RCA Male to Male	6000±40	45P PVC molding (Orange) PANTONE 1525PC (0,58,100,10)	6M
ELE14010M	2RCA Male to Male	10000±40	45P PVC molding (Purple) PANTONE 520 PC (64,100,12,0)	10M

sticker size:



Wiring Diagram



No.	Q'ty	Unit	parts	remark
①	2	PCS	Connector	Gold plated RCA Male
③	2	PCS	outer molding	60P Black PVC
④	1	PCS	cable spec	Black digital cable, OD:5.0+5.0mm stranded conductor ((17/0.12BC+PE) +2.0MM+AL+64 #/0.12BC) +2F

CABLE SPECIFICATION

ITEM			SPEC
CENTER CONDUCTOR	MATERIAL		BARE COPPER WIRE
	CONSTRUCT	MM/NO.	0.12mm/17C
	O.D.	MM	0.12
INSIDE INSULATION	MATERIAL		PE
	O.D	MM	2.8mm±0.1*2F
	COLOR		RED/WHITE
DRAIN SHIELD	MATERIAL		BARE COPPER WIRE
	TYPE		BRAID
	CONSTRUCT	MM/NO.	Aluminum foil(AL)+0.12MM/64#
PVC JACKET	MATERIA		PVC
	O.D	MM	5.0+5.0MM±0.15
	COLOR		BLACK

Note:
1.Test condition: Voltage withstand 500v; Insulation Resistanec:5M Ω; conductor Resistance:10Ω 100% pass.
2.All parts are compliant to RoHS cable spec.

Scale	1:1	Unit	mm		Drawing		Approved		Checked	
				Drawing No.	US002-BHD006		REV	A1	Date	2012-05-11