



INSTALLATION

Step 2: Mount the VESA plate to the TV


1. Line the plate up with the TV's VESA pattern

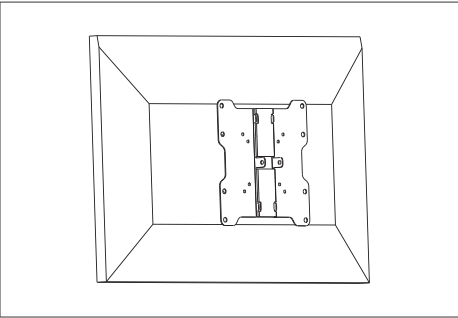


2. Attach plate to TV with mounting hardware

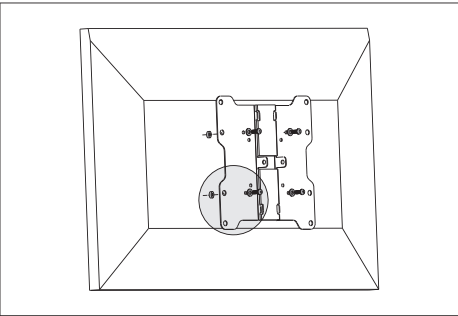

3. Make sure the plate fits correctly to the TV

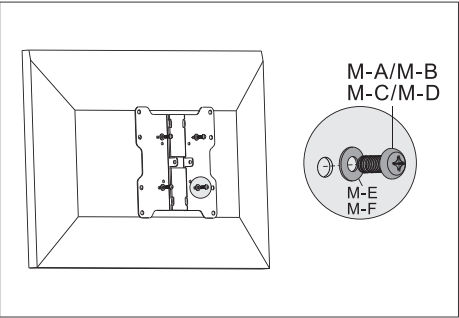


4. Use appropriate spacers if necessary


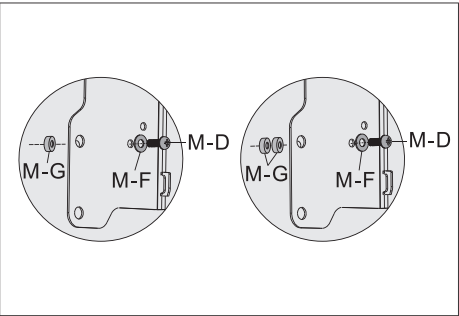


Step 3: Secure TV


1. Hang TV

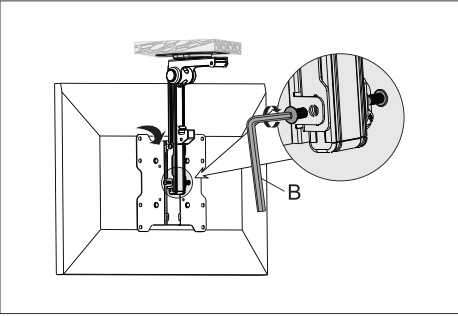

2. Secure in place

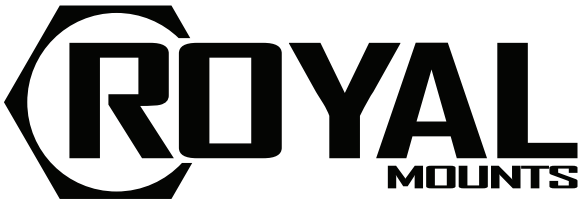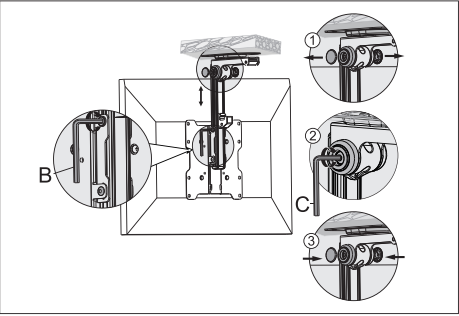

ROY7701B USER MANUAL

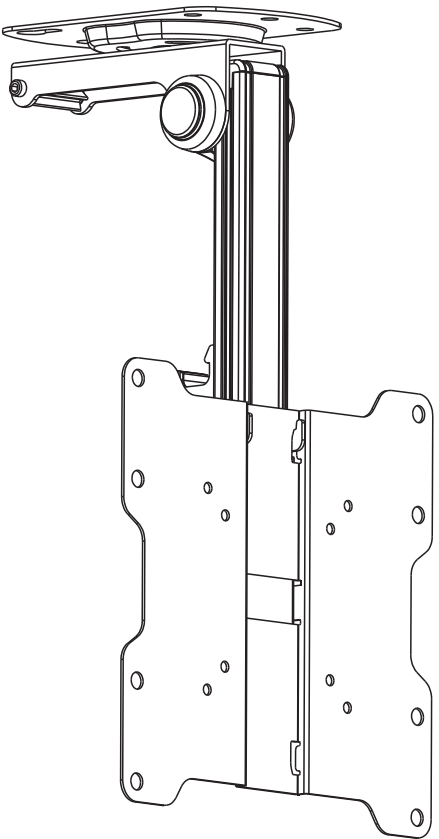

CABINET MOUNT

Flat Panel TV's

13"-37"

LIMITED LIFETIME WARRANTY

This Royal product carries a LIMITED LIFETIME WARRANTY on both parts and labor. Should your mount fail to operate properly at any time during the warranty period, Royal will repair or replace (at our option) the item barring any indication of misuse or abuse. Freight to a Royal authorized facility is paid by the customer. Return freight is paid by Royal. Warranty registration occurred automatically at the time your order was placed. There is no need to complete or mail in additional paperwork. If you have any questions about the operation or installation of this product, please call our distributor, Skywalker AV Supply at (800) 844-9555 or (636) 272-8025. Skywalker AV Supply hours of operation are from 8am to 5pm CST.

SUPPORT

800.844.9555
techsupport@skywalker.com
skywalker.com




© 2018 Royal Mounts
All Rights Reserved

INTRODUCTION

Congratulations!

The ROY7701B Cabinet Mount is a great solution for mounting TV's ranging from 13 inches up to 37 inches.

This mount can support up to 44 pounds. It has a profile that puts it at 3.3 inches from the wall.



WHAT'S IN THE BOX

Mount Pieces

A (x1)	B (x1)	C (x1)	

TV Mounting Hardware

M-A (x4)	M-B (x4)	M-C (x4)	M-D (x4)	M-E (x4)	M-F (x4)	M-G (x8)	
M4x14	M5x14	M6x14	M8x20	D5	D8		

Wall Mounting Hardware

W-A (x4)	W-B (x4)	W-C (x2)

Tools Needed

- Pencil
- Screwdriver (Phillips)
- Drill
- Stud Finder *

VESA Patterns


- 75x75
- 100x100
- 200x100
- 200x200

INSTALLATION


Step 1: Mount the back plate to the cabinet

For Drywall


1. Remove the TV mounting plate

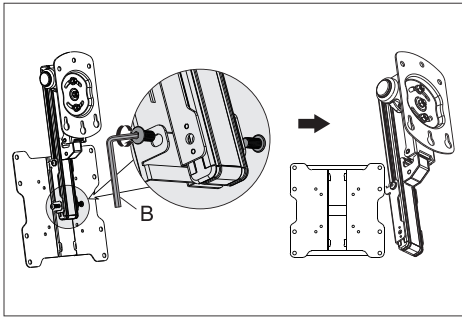


2. Use a stud finder to locate a stud

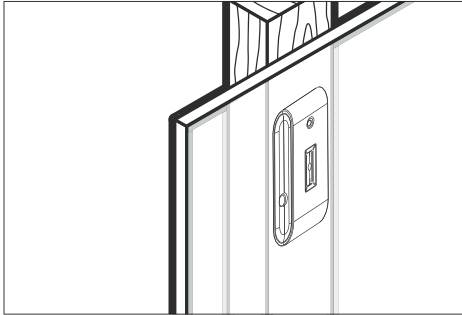

3. Mark and drill 3/16" holes for each screw

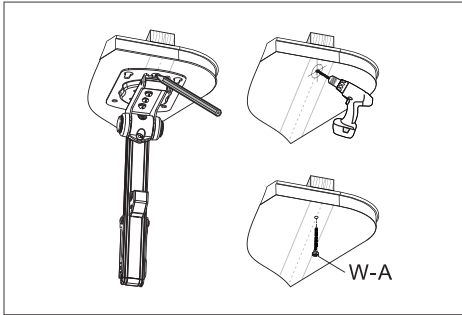


4. Mount the back plate to the cabinet

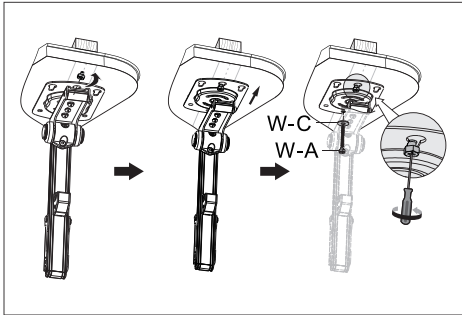


For Concrete


1. Remove the TV mounting plate

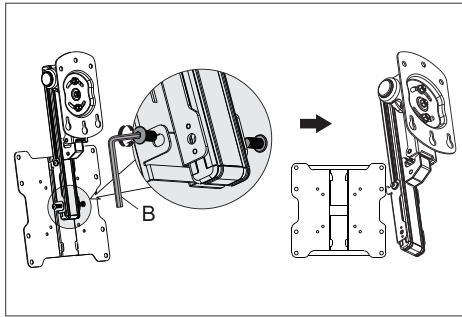

2. Find the ideal mounting location

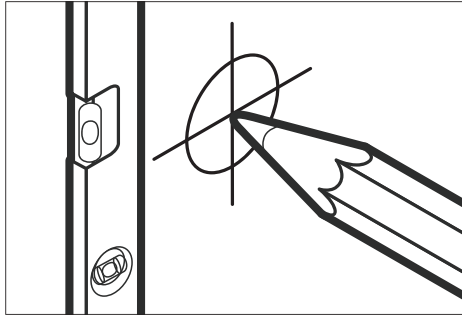

3. Mark and drill 3/8" holes for each anchor/screw

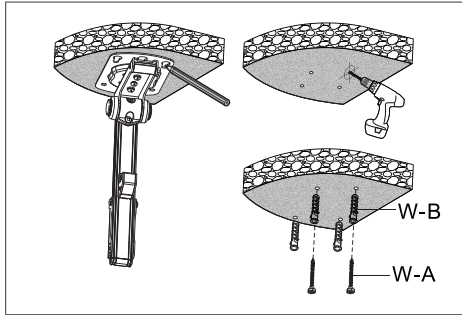

4. Mount the back plate to the cabinet

