



INSTALLATION

Step 2: Mount the VESA brackets to the TV


1. Line the brackets up with the TV's VESA pattern




3. Make sure the brackets fit correctly to the TV



2. Attach brackets to TV with mounting hardware




4. Use appropriate spacers if necessary




Step 3: Secure TV

1. Hang TV




2. Secure in place



ROY7704B

USER MANUAL

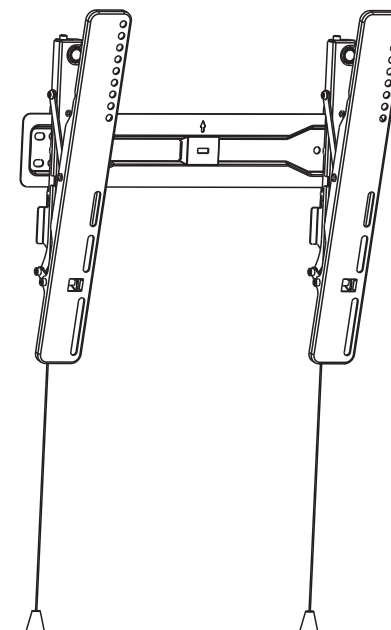

TILTING WALL MOUNT

Flat Panel TV's

32"-55"

LIMITED LIFETIME WARRANTY

This Royal product carries a LIMITED LIFETIME WARRANTY on both parts and labor. Should your mount fail to operate properly at any time during the warranty period, Royal will repair or replace (at our option) the item barring any indication of misuse or abuse. Freight to a Royal authorized facility is paid by the customer. Return freight is paid by Royal. Warranty registration occurred automatically at the time your order was placed. There is no need to complete or mail in additional paperwork. If you have any questions about the operation or installation of this product, please call our distributor, Skywalker AV Supply at (800) 844-9555 or (636) 272-8025. Skywalker AV Supply hours of operation are from 8am to 5pm CST.

SUPPORT

800.844.9555
techsupport@skywalker.com
skywalker.com



© 2018 Royal Mounts
All Rights Reserved

INTRODUCTION

Congratulations!

The ROY7704B Tilting Wall Mount is a great solution for mounting TV's ranging from 32 inches up to 55 inches. This mount can support up to 77 pounds. It's low profile design puts it only 1.2 inches from the wall.



TV SIZE
32" - 55"



MAX LOAD
77lbs



1.2" INCH
PROFILE



MAX VESA
400 X 400



BLACK
FINISH

WHAT'S IN THE BOX

Mount Pieces

A (x2)	B (x1)	C (x1)	

TV Mounting Hardware

M-A (x4)	M-B (x4)	M-C (x4)	M-D (x4)	M-E (x4)	M-F (x4)	M-G (x4)	M-H (x8)	M-I (x8)
M5x14	M6x14	M6x30	M8x30	M8x50	D5	D8		

Wall Mounting Hardware

W-A (x4)	W-B (x4)	W-C (x4)

Tools Needed

- Level
- Screwdriver (Phillips)
- Pencil
- Stud Finder *
- Drill

VESA Patterns


- 100x100
- 100x150
- 150x100
- 150x150
- 100x200
- 200x100
- 200x200
- 300x200
- 300x300
- 400x200
- 400x300
- 400x400

INSTALLATION


Step 1: Mount the back plate to the wall

For Drywall


1. Use a stud finder to locate a stud




2. Level and line the back plate up to mark the wall



3. Drill a 3/16" hole for each mounting screw



4. Mount the back plate to the wall




For Concrete


1. Find the ideal mounting location



2. Level and line the back plate up to mark the wall



3. Drill a 3/8" hole for each mounting anchor



4. Mount the back plate to the wall

