



INSTALLATION

Step 2: Mount the Arms to the TV


1. Line the arms up with the TV's VESA pattern




2. Attach arms to TV with mounting hardware



3. Make sure arms fit correctly to the TV




4. Use appropriate spacers if necessary




Step 3: Hang TV and Make Adjustments

1. Hang TV and install security bar

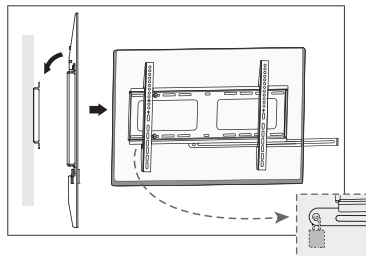

2. Adjust, tilt, and tighten security screw



LIMITED LIFETIME WARRANTY

This Royal product carries a LIMITED LIFETIME WARRANTY on both parts and labor. Should your mount fail to operate properly at any time during the warranty period, Royal will repair or replace (at our option) the item barring any indication of misuse or abuse. Freight to a Royal authorized facility is paid by the customer. Return freight is paid by Royal. Warranty registration occurred automatically at the time your order was placed. There is no need to complete or mail in additional paperwork. If you have any questions about the operation or installation of this product, please call our distributor, Skywalker AV Supply at (800) 844-9555 or (636) 272-8025. Skywalker AV Supply hours of operation are from 8am to 5pm CST.


SUPPORT

800.844.9555
techsupport@skywalker.com
skywalker.com

© 2021 Royal Mounts
All Rights Reserved

ROY7711B

USER MANUAL

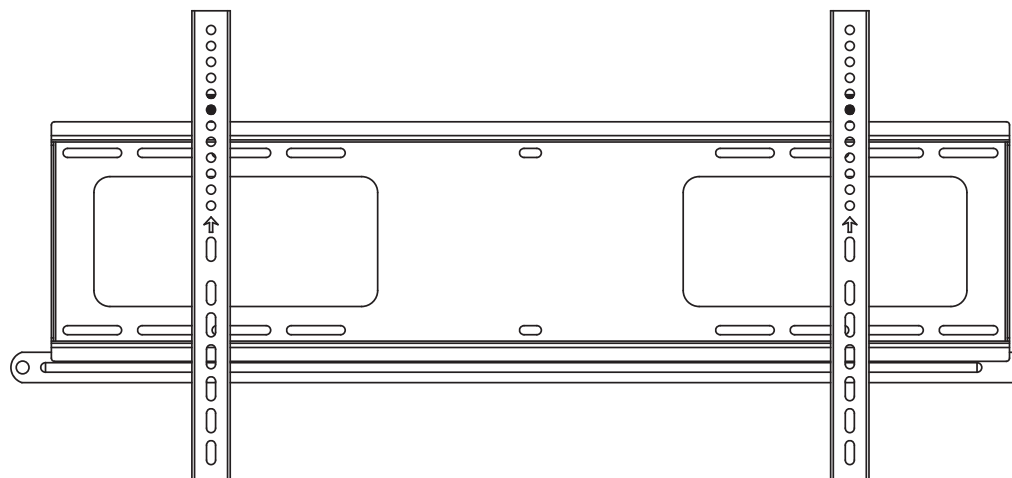

FIXED WALL MOUNT

Flat Panel TV's

43'-90''

INTRODUCTION

Congratulations!

The ROY7711B Fixed Wall Mount is a great solution for mounting 43 to 90 inch TV's. This mount can support up to 176 pounds. It's locking bar secures the TV within the mount for added theft deterrence when paired with a padlock.



WHAT'S IN THE BOX

Mount Pieces

A (x1)	B (x2)	C (x1)	D (x1)
E (x1)			

TV Mounting Hardware

M-A (x4)	M-B (x4)	M-C (x4)	M-D (x4)	M-E (x4)	M-F (x4)	M-G (x8)	M-H (x8)
M5x14	M6x14	M6x30	M8x30	M8x50			

Wall Mounting Hardware

W-A (x6)	W-B (x6)	W-C (x6)
STD6.3x55	Ø10x45	

Tools Needed

- Level
- Socket Wrench
- Pencil
- Screwdriver (Phillips)
- Drill
- Stud Finder *

VESA Patterns


- 200x200
- 300x300
- 400x300
- 600x400
- 300x200
- 400x200
- 400x400
- 800x400

INSTALLATION


Step 1: Mount the back plate to the wall

For Drywall


1. Use a stud finder to locate the studs




2. Align the back plate and mark wall



3. Drill a 3/16" hole for each mounting screw




4. Mount the back plate to the wall




For Concrete


1. Find the ideal mounting location



2. Align the back plate and mark the wall



3. Drill a 3/8" hole for each mounting anchor



4. Mount the back plate to the wall

