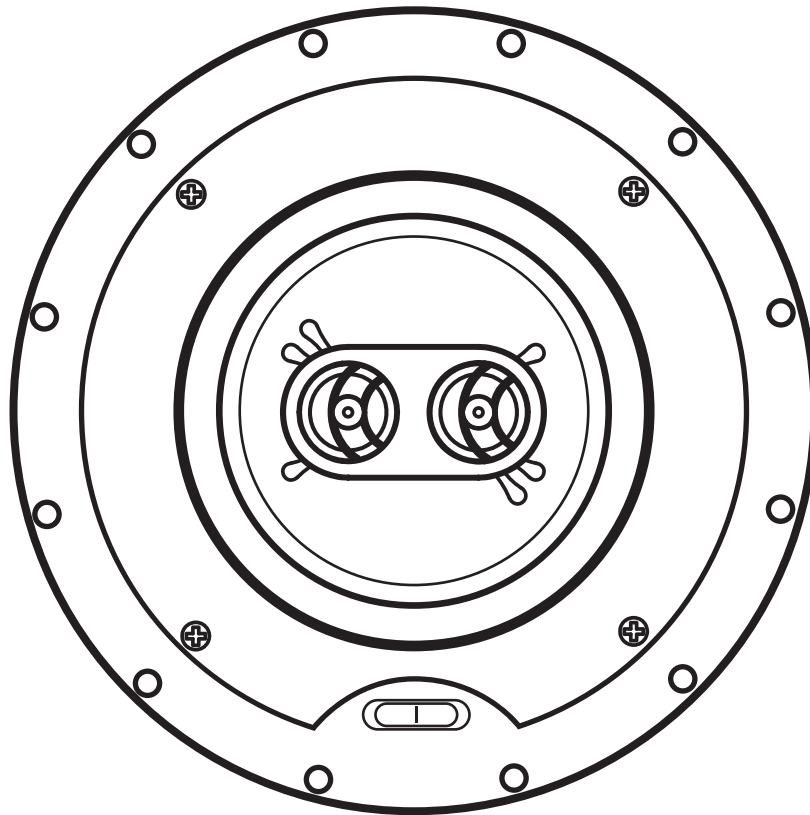




SAG6026 USER MANUAL

6½" In-Ceiling Stereo Speaker



ELITE SERIES



INTRODUCTION



Welcome to the Saga Sound experience! We don't call this series "Elite" for nothing. Our Elite Series audio line boast components and craftsmanship ideal for extraordinary sound performance. You don't have to spare design for quality with the Elite Series.

The discrete, compact format of this speaker makes it ideal for many applications where traditional speakers would be impractical or impossible. In-ceiling speakers are designed so that the ceiling and the space behind them actually become the speaker cabinet. Mounted flush to the wall or ceiling, they require absolutely no floor space. The frames and grilles may be painted to blend with any decor.

SPECIFICATIONS

SAG6026	6 ½" In-Ceiling Stereo Speaker
Woofer	6.5" Black Polypropylene Mica Cone w/ Rubber Surround
Tweeter	Two 20mm Silk Dome Tweeters w/ 6dB Crossover
Crossover Switch	High-End 6dB (0dB, -3dB, -6dB)
Frequency Response	60Hz - 20KHz
Impedance	8Ω ohms
Power Handling	RMS: 40Wx2, MAX: 80Wx2
Efficiency	Sensitivity: 85dB
Magnetic Grille	Magnetic Steel Grille
Overall Dimensions	9.76" Diameter x 3.5" Depth w/ Grille

DIMENSIONS

Overall Diameter	Cutout Diameter	Cutout Depth
		
9.29" (236mm)	7.89" (200.5mm)	3.35" (85mm)



Adjust the Sound

Use the switch on the face of the speaker to adjust the sound of the tweeter.

There are three sound options: **0dB**, **-3dB**, and **-6dB**.




INSTALLATION


This speaker features classic “dog ear” mounting tabs. Simply screw the tabs down to keep the speaker in place. Allow at least 1.5" of clearance between the cut out and any studs or joists for the mounting hardware to work properly. A mounting depth of 3.35" measured from the face of the wall is also required. The speaker location and associated mounting hardware should not conflict with any existing wires or pipes.

1


Determine the desired speaker placement and trace around the included cut-out template.

**4**


Push the speaker into place and make any necessary final adjustments.

**2**


Use a drywall saw or hole saw to cut the hole for the speaker.

**5**


Using a Phillips screwdriver tighten the mounting tabs until the speaker is secured in place.

**3**

Be sure to attach the speaker wire to the proper terminals.

**6**

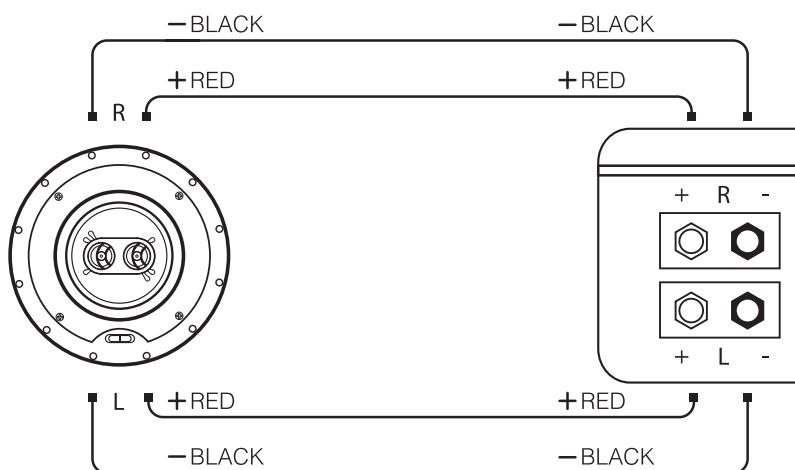
Finish the speaker installation by placing the magnetic grille on the speaker.





CONNECTION

When connecting your in-ceiling speaker, it is very important to retain the correct polarity. To do this, be sure that the wire attached to the "+", red, positive, or hot terminal on the speaker connects to the "+", red, positive or hot terminal on the source component. Similarly, the "-", black, negative or ground terminal on the speaker must connect to the respective "-", black, negative or ground terminal on the source component.



WARRANTY

Limited Lifetime Warranty

This Saga product carries a LIMITED LIFETIME WARRANTY on both parts and labor. Should your Saga component fail to operate properly at any time during the warranty period, Saga will repair or replace (at our option) the item barring any indication of misuse or abuse. Freight to a Saga authorized facility is paid by the customer. Return freight is paid by Saga. Warranty registration occurred automatically at the time your order was placed. There is no need to complete or mail in additional paperwork. If you have any questions about the operation or installation of this product, please call our distributor, Skywalker Communications at (800) 844-9555 or (636) 272- 8025. Skywalker Communications hours of operation are from 8am to 5pm CST.

TECHNICAL SUPPORT

800.844.9555
techsupport@skywalker.com
skywalker.com

