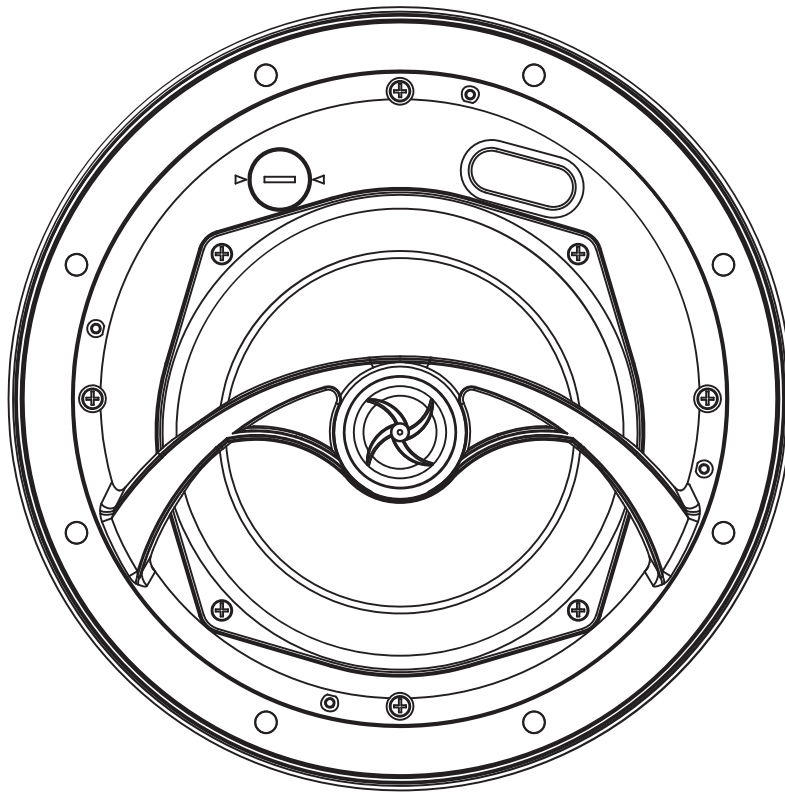




SAG9026IC USER MANUAL

6½" 2-Way In-Ceiling Speaker (Pair)



CONTRACTOR



INTRODUCTION



Welcome to the Saga Sound experience! The Saga Contractor Series Speakers are an economical choice for dens, kitchens, bathrooms, or patios. So when you need a quality speaker for less, Saga has you covered. The Contractor Series is the perfect choice for easy listening in Residential or Commercial areas.

The discrete, compact format of this speaker makes it ideal for many applications where traditional speakers would be impractical or impossible. In-ceiling speakers are designed so that the ceiling and the space behind them actually become the speaker cabinet. Mounted flush to the wall or ceiling, they require absolutely no floor space. The frames and grilles may be painted to blend with any decor.

SPECIFICATIONS

SAG9026IC	6 ½" 2-Way In-Ceiling Speaker
Woofers	6.5" Black Kevlar Woven Cone w/ Rubber Surround
Tweeter	20mm Silk and Titanium Swivel Dome Tweeter
Crossover	High-End 6dB
Frequency Response	58Hz - 20KHz
Impedance	8Ω ohms
Power Handling	RMS: 40W, MAX: 80W
Efficiency	Sensitivity: 88dB
Pressure Fit Grille	Magnetic Steel Grille
Overall Dimensions	10.5" Diameter x 3.7" Depth

DIMENSIONS

Overall Diameter	Cutout Diameter	Cutout Depth
		
10.5" (257mm)	8.66" (220mm)	3.46" (88mm)

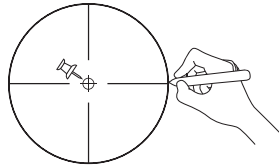


INSTALLATION

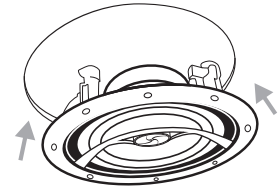
This speaker features classic “dog ear” mounting tabs. Simply screw the tabs down to keep the speaker in place. Allow at least 1½” of clearance between the cut out and any studs or joists for the mounting hardware to work properly. A mounting depth of 3.46” measured from the face of the wall is also required. The speaker location and associated mounting hardware should not conflict with any existing wires or pipes.

1


Determine the desired speaker placement and trace around the included cut-out template.

**4**

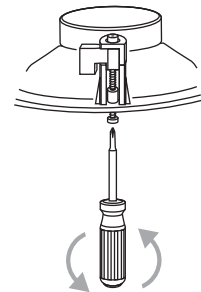
Push the speaker into place and make any necessary final adjustments.

**2**


Use a drywall saw or hole saw to cut the hole for the speaker.

**5**


Using a Phillips screwdriver tighten the mounting tabs until the speaker is secured in place.

**3**

Be sure to attach the speaker wire to the proper terminals.

**6**

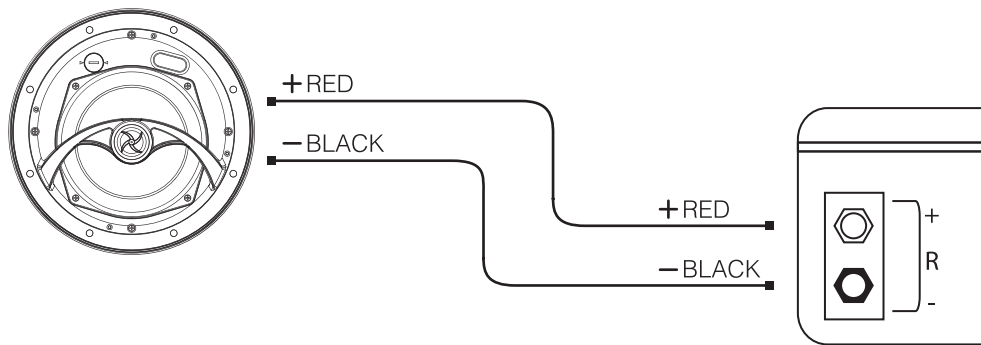
Finish the speaker installation by placing the magnetic grille on the speaker.





CONNECTION

When connecting your in-ceiling speaker, it is very important to retain the correct polarity. To do this, be sure that the wire attached to the "+", red, positive, or hot terminal on the speaker connects to the "+", red, positive or hot terminal on the source component. Similarly, the "-", black, negative or ground terminal on the speaker must connect to the respective "-", black, negative or ground terminal on the source component.



WARRANTY

Limited Lifetime Warranty

This Saga product carries a LIMITED LIFETIME WARRANTY on both parts and labor. Should your Saga component fail to operate properly at any time during the warranty period, Saga will repair or replace (at our option) the item barring any indication of misuse or abuse. Freight to a Saga authorized facility is paid by the customer. Return freight is paid by Saga. Warranty registration occurred automatically at the time your order was placed. There is no need to complete or mail in additional paperwork. If you have any questions about the operation or installation of this product, please call our distributor, Skywalker Communications at (800) 844-9555 or (636) 272- 8025. Skywalker Communications hours of operation are from 8am to 5pm CST.

TECHNICAL SUPPORT

800.844.9555
techsupport@skywalker.com
skywalker.com

