




VIVID FILM SCREENS



SOUND VIEW SERIES
USER MANUAL

CONTENTS

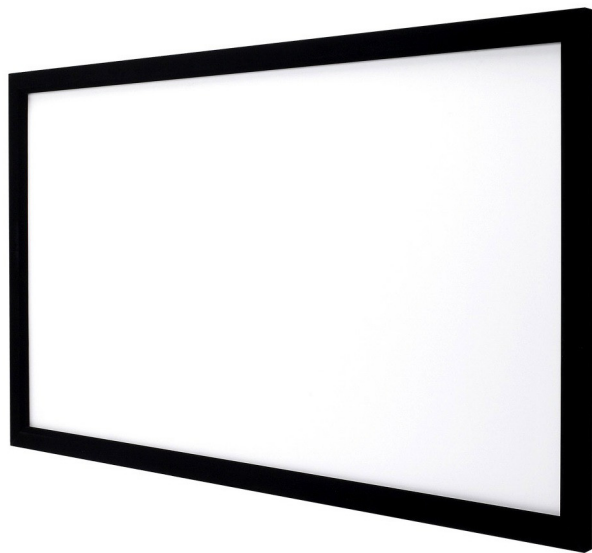

VIVID MODELS

- » VFS492SVS
- » VFS4106SVS
- » VFS4120SVS
- » VFS4133SVS

INTRODUCTION 04

- copyright
- included in box
- tools needed

PRECAUTIONS 06

- attention
- environmental conditions
- cautions

ASSEMBLY 08

- installation
- how to uninstall



INTRODUCTION

Dear Customer!

Congratulations on making your purchase. We hope you enjoy using your new projection screen.

In order to make each viewing a unique video-cinema experience, we have provided this user manual containing detailed information about installing and operating your new projection screen.

Be sure to read through all the information in this manual before using and/or attempting to install the equipment.









Please note that your warranty will become void in the event that the equipment is handled, installed, or operated incorrectly.

The contents of this user manual will guide you through the proper handling, installing, and operating of your new Vivid projection screen.



Included in Box:

- Horizontal Frames (2)
- Vertical Frames (2)
- Corner Brackets (4)
- Top Mount (1)
- Bottom Mount (1)
- Horizontal Tension Bars (2)
- Vertical Tension Bars (2)
- 10mm Corner Screws (16)
- Tension Pegs
- Fabric

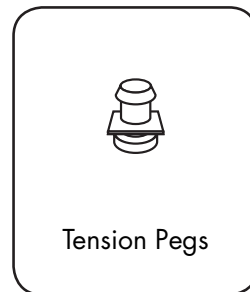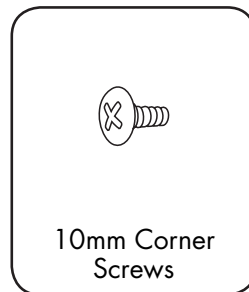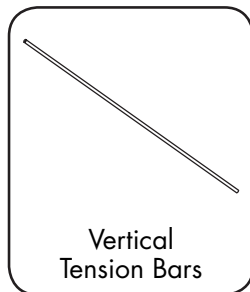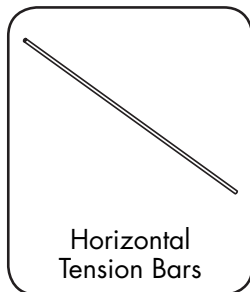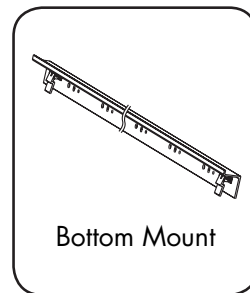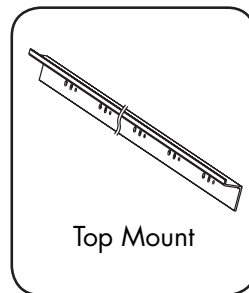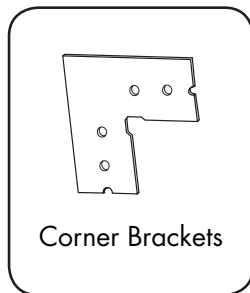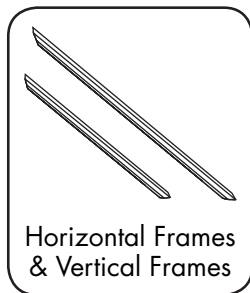**Tools Needed:**

Electric Drill, Level, & (8) Screws Suitable for Wall Type

PRECAUTIONS

Attention:

Fix Frame Screen consists of a light-weight aluminum frame. Handle it with care to avoid damage.

When not in use, cloth or curtain can be used to cover the screen to avoid dirt or foreign objects.

When cleaning the screen fabric, please use soft cloth with little clean water. No cleaning agents shall be used.

Please do not touch the fabric with fingers or sharp edge like a blade.

Do not hang anything on the frame.

Environment:

Temperature should be between -5°C(22°F) and 40°C(104°F). Humidity level below 90%.

Not too dusty.


Cautions:

The screen should be mounted indoors.

Please make sure that the wall structure can support the weight and is suitable for installation.

Please make sure that screen is level after installation.


This installation process can only be performed by adult.




No Moisture




Keep Distance



Wall Mounted Installation



No Heavy Objects

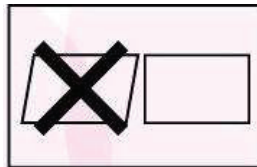

Level Frame



Only For Adults

ASSEMBLY

1. Lay each section of the frames on a tidy, flat surface. (Fig. 1)

2. Slide tension pegs into grooves on the reverse side of frames. (Fig. 2-3)

3. Connect both horizontal and vertical frame sections with the corner brackets. Ensure all joints are square and then tighten the 10mm corner screws. (Fig. 4-7)

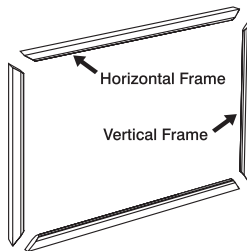


Fig 1

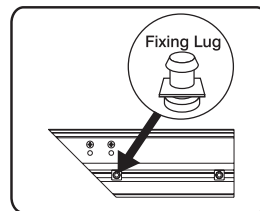


Fig 2

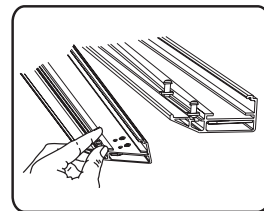


Fig 3




Fig 4




Fig 5




Fig 6




Fig 7

4. Unfold the screen fabric and insert the tension bars into the perimeter slots of the fabric. Make sure the smooth white surface (no seams) is facing forward. (Fig. 8-10)

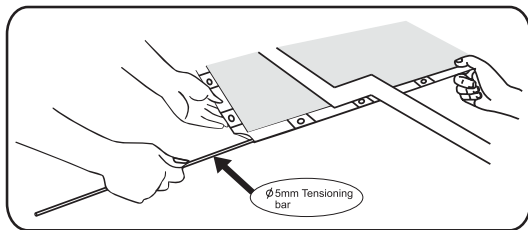


Fig 8




Fig 9

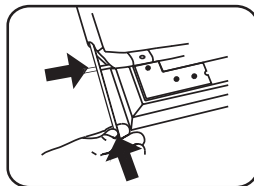


Fig 10

5. Align tension pegs with eyelets on the Fabric. Using the tension bar, pull the fabric over the tension pegs making sure the bar is on the back side. (Fig. 11-15)

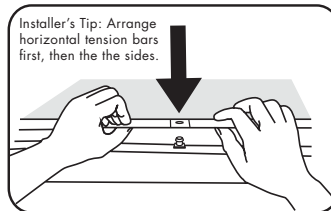


Fig 11




Fig 13




Fig 14

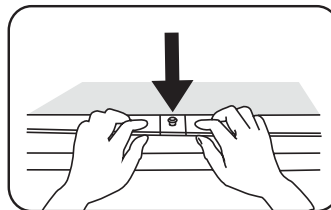


Fig 12






Fig 15


6. There is a locking latch on the bottom wall mount only. (Fig. 16)

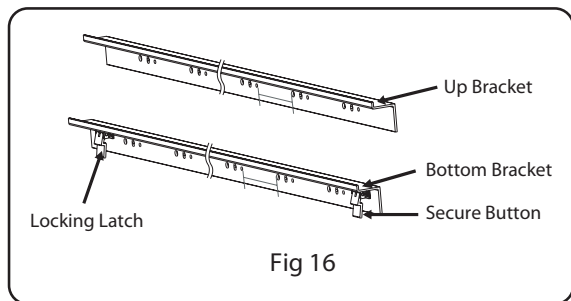


7. Fix the mounts onto the wall separately. (Fig. 17-18)

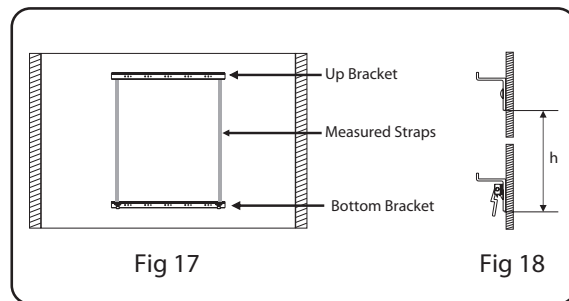

8. Hook screen onto the top mount and bottom mount. (Fig. 19-20)

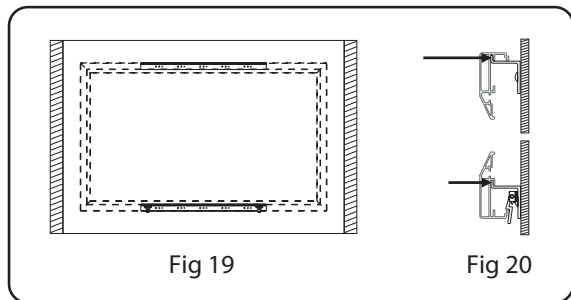

9. To uninstall the screen, please press the latch towards the wall to release bottom frame from bottom mount. Then, lift the screen a little to release it totally from top and bottom groove of the mounts. (Fig. 21-22)

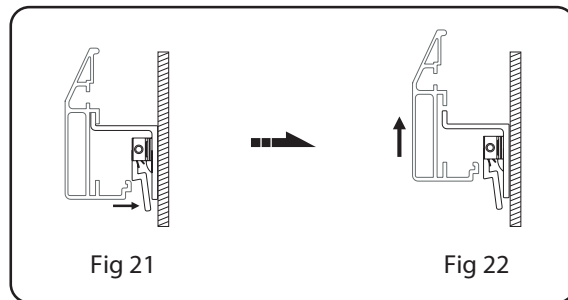

Happy Viewing!



Make a Splash!

WWW.SKYWALKER.COM

9390 VETERANS MEMORIAL PKWY, O'FALLON, MO 63366 | 800.844.9555