


engineering specifications

Model PR-5646



Active Elements 25
Boom Length 66.5"
Turning Radius 60.5"
Maximum Width 104" **Net Weight** 5.0 lbs.
Vertical Height 19" **Shpg. Weight** 6.5 lbs.
Element Diameter 3/8" **Carton Dimensions** 6.25"x6.25"x68.25"

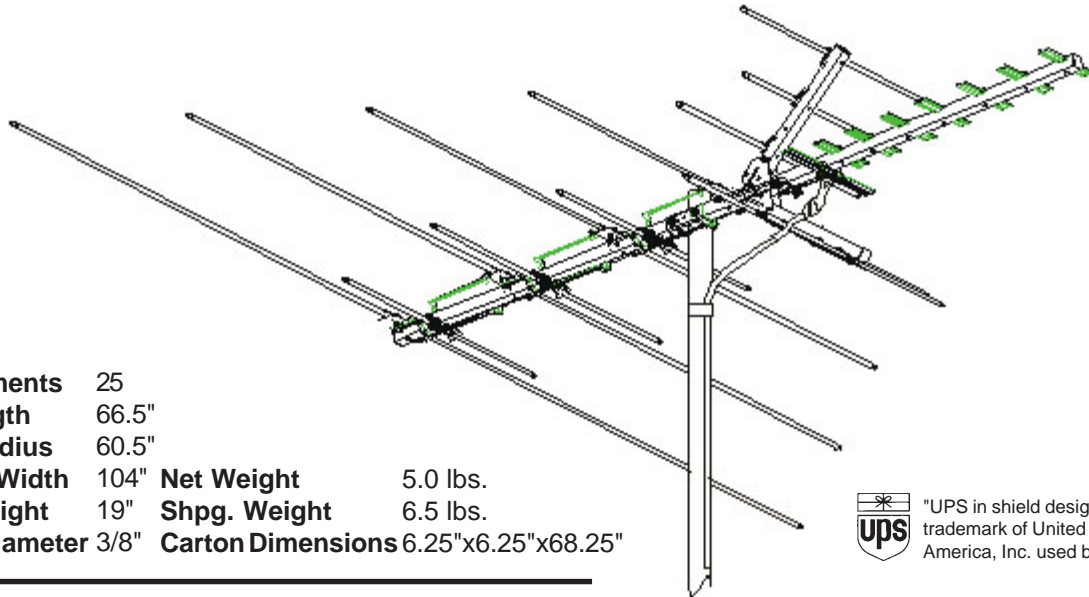

"UPS in shield design is a registered trademark of United Parcel Service of America, Inc. used by permission."

Output Impedance: 300 ohm / 75 ohm with included transformer
Recommended Preamp: AP Series

Made in U.S.A.

CHANNEL	CH.2	CH.4	CH.6	CH.7	CH.9	CH.11	CH.13	CH.14	CH.32	CH.50	CH.69
dB gain over reference dipole	3.0	3.5	2.2	7.1	7.4	7.7	7.2	9.0	9.4	9.4	7.8
beamwidth at half power points	77°	76°	74°	36°	39°	40°	40°	52°	50°	46°	31°
front-to-back ratio	3.5dB	7dB	9dB	9dB	7dB	8.5dB	13dB	8dB	19dB	17dB	11dB

POLAR PATTERNS

