
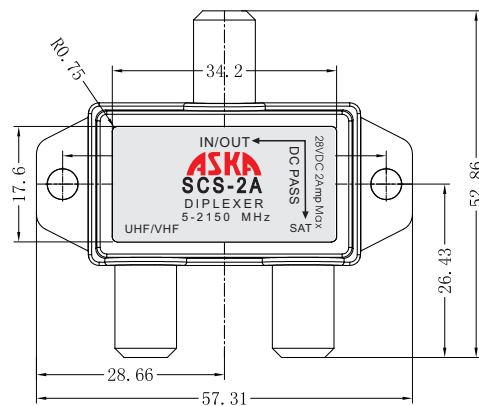


Mounting screw:

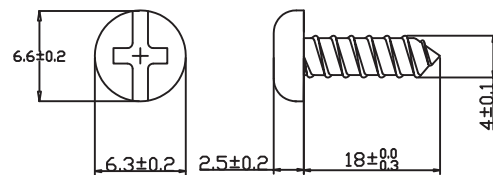

Other specifications:

1. Threads- 3/8-32 UNEF - (9.3MM+/- 0.1)
2. Rotational torque - 75 lb-in Min.

MODEL NUMBER		SCS-2A	
Frequency Range(MHz)		QC	TYP
Insertion Loss (Max dB)	40-750MHz	1.5	1.0
	750-806MHz	1.5	1.0
	950-2150MHz	1.5	1.0
Return Loss (Min dB)	40-806MHz	12	15-20
	950-2150MHz	12	15-20
ISOLATION (Min dB)	40-750MHz	35	40-50
	750-806MHz	35	40-50
	950-2000MHz	35	40-50
	2000-2150MHz	35	40-50

ASKA COMMUNICATION CORP.
POMPANO BEACH, FI.U.S.A.

4	Mounting Screws	1/4" hex head 3/4" Long Steel	2	Nickel- 2um-thick	POMPANO BEACH,FL,U.S.A.					
3	insulator	purper, blue, white	3	pp	BRAND		DATE:	11.03.06	UNIT	Millimeter
2	Seizing pin	Phosphor bronze	3	Silver plating,2 um thick						
1	Case	Zinc Alloy die-cast	1	Nickel plating, 3 um thick						
					MODEL#	SCS-2A	Rev :	12.06.06	Tolerance: +/- 0.5 mm:	
NO	PARTS	MATERIAL	Q' TY	FINISH or PLATING	DESCRIPTION	SPLITTER,5-2150MHz, DIPLEXER				