


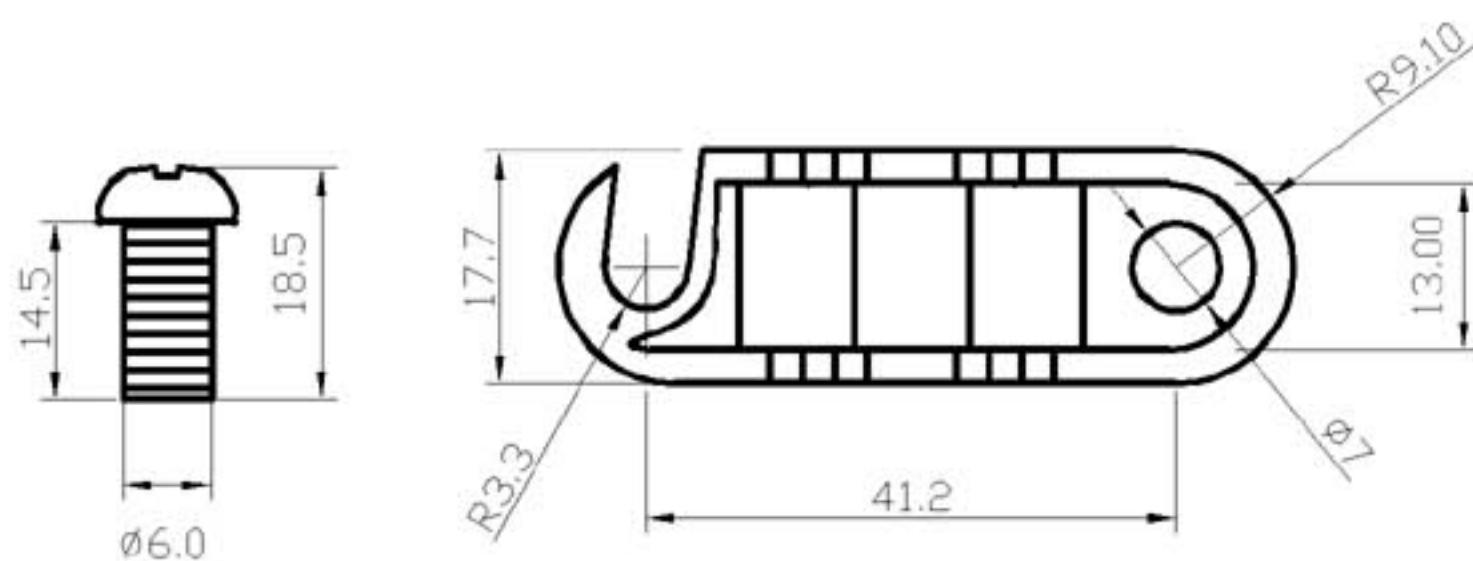


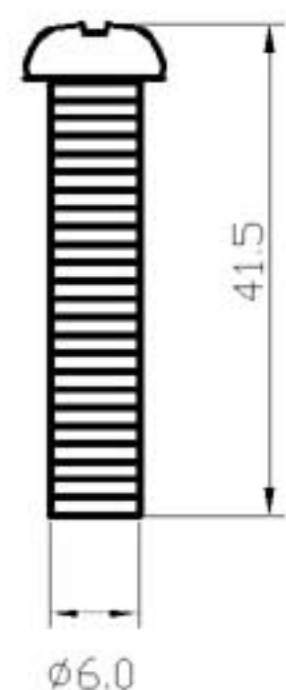




Screw2

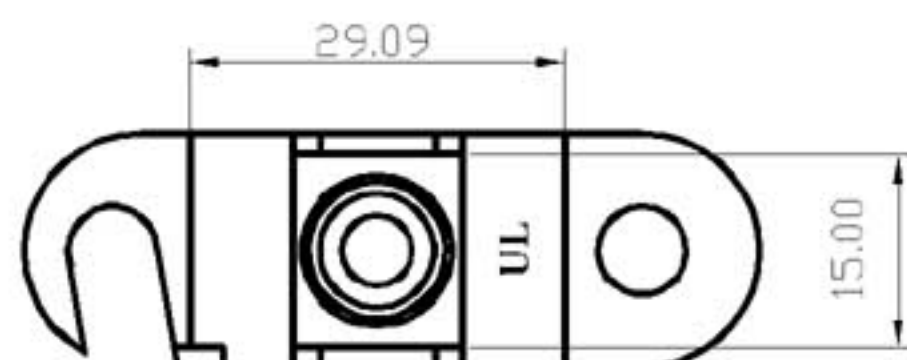


Screw 1

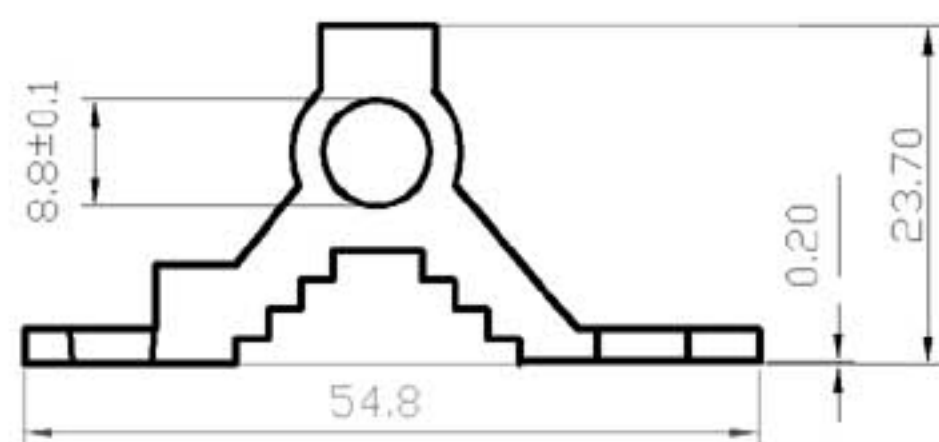

Part 1

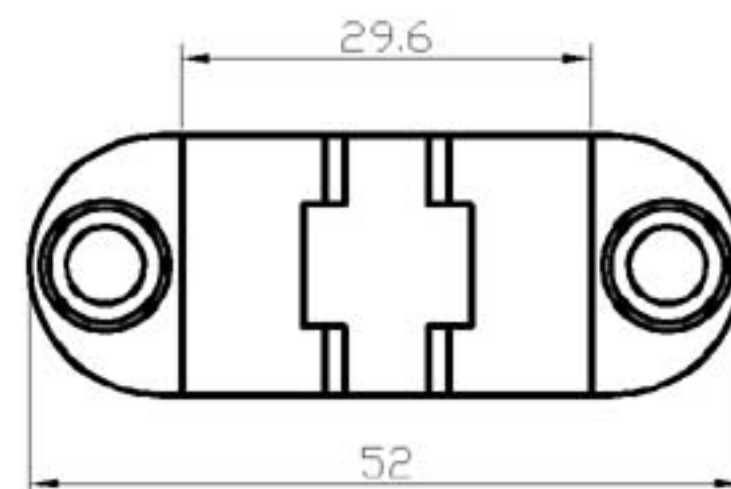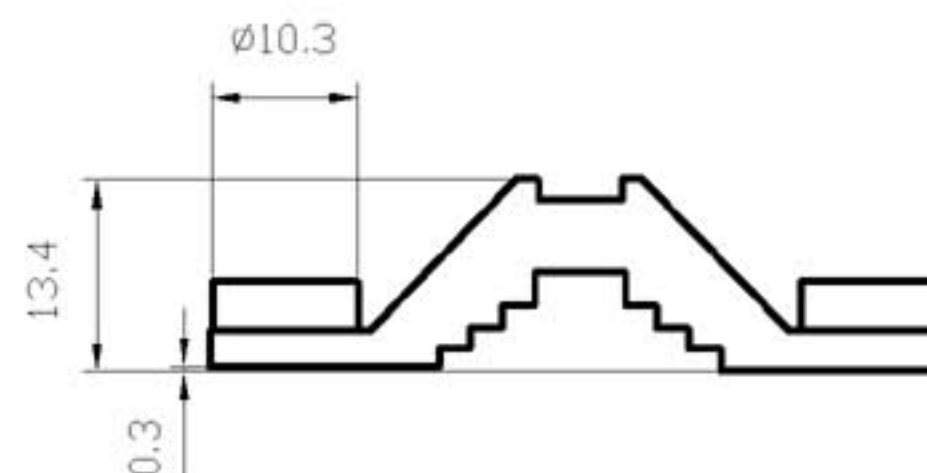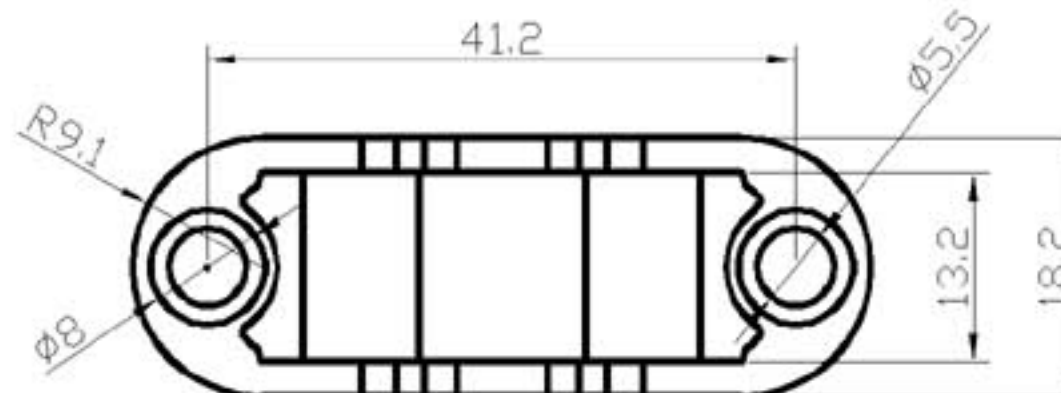

Part 2

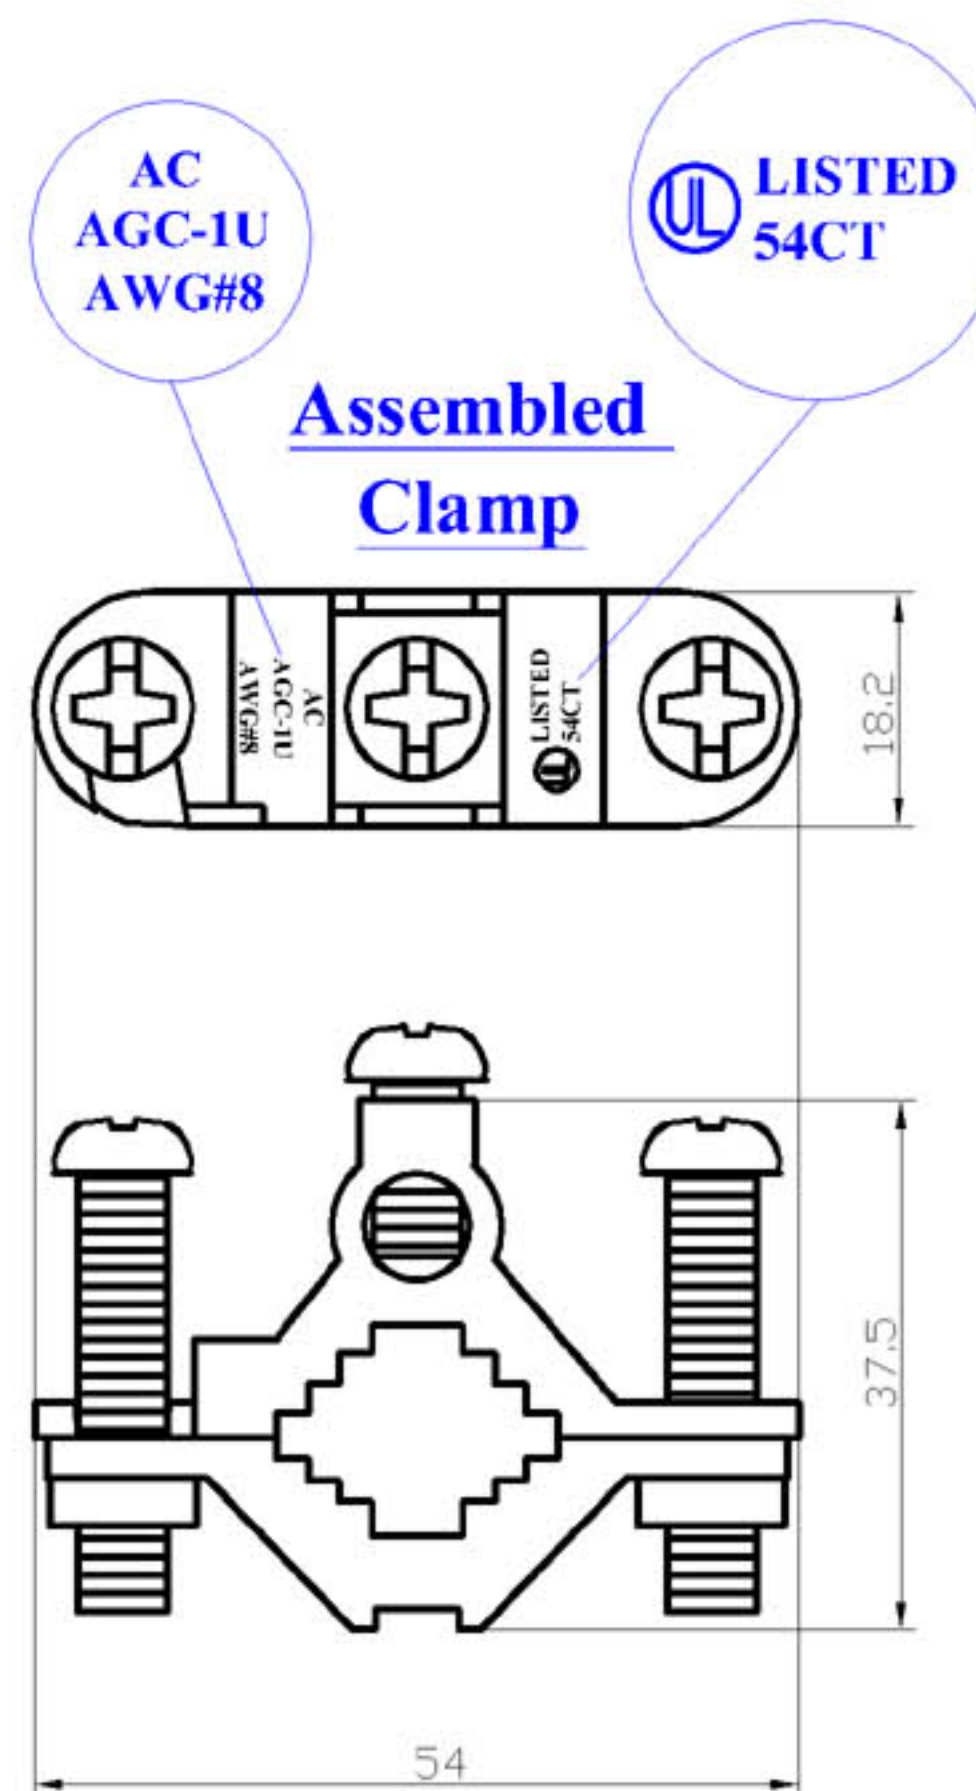

Assembled Clamp

Other Specifications:

1. Complies with UL listing File No. E306183
2. Torque limit-50 lb-in
3. Designed to accomodate grounding wire gauge for AWG #8.
4. Salt Spray testing-Complies with ASTM B 117-97

4	Screw 2	Iron	1	Nickel, 3 um thick
3	Screw 1	Iron	2	Nickel, 3 um thick
2	Part 2	Zinc dia-cast	1	Galvanized, 3 um thick
1	Part 1	Zinc dia-cast	1	Galvanized, 3 um thick
NO.	PARTS	MATERIAL	Q'TY	FINISH or PLATING

ASKA COMMUNICATION CORP.
Pompano Beach, FL. U.S.A.

BRAND		SCALE	0.75 : 1	UNIT	Millimeter
		Tolerance		± 0.50 mm	
MODEL#	AGC-1U	DATE Sep 29, 2005		DRAWER: Andrew	
		Rev 1: 11/29/06			
DESCRIPTION	Ground Clamp, 1/2" to 1" Pipe				