

RET1024

**Retina Vandal Proof Outdoor Camera
with SONY High Resolution CCD Sensor**



INTRODUCTION

The RET1024 color camera employs the latest SONY technology optical components. This indoor/outdoor model features a water – resistant housing. It will provide rich color, high definition pictures. Easy to install and convenient to use. It will adapt to most CCTV systems. Please read this instruction manual carefully to ensure proper use of the product.

WARNINGS



To prevent fire or shock hazard, do not expose the unit to prolonged contact with water.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the application.



This symbol is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electrical shock to persons.



CAUTION
Risk of Electrical Shock DO NOT OPEN



CAUTION: TO REDUCE THE RISK OF ELECTRICAL SHOCK DO NOT REMOVE COVER OR BACK. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

CAUTION: TO PREVENT ELECTRICAL SHOCK AND RISK OF FIRE HAZARDS, DO NOT USE OTHER THAN SPECIFIED POWER SOURCE.



CAUTION
Risk of Damaging Camera



CAUTION: PLEASE NOTE THE CAMERA’S OPERATING TEMPERATURE AND ENVIRONMENT REQUIREMENTS. AVOID USING THE CAMERA AT EXTREME TEMPERATURES.

CAUTION: NEVER POSITION THE CAMERA TO FACE THE SUN OR A BRIGHT OBJECT. THIS MIGHT DAMAGE THE CCD.

CAUTION: DO NOT MOUNT THE CAMERA NEAR A HEAT SOURCE.

CAUTION: USE ONLY THE RECOMMENDED POWER SUPPLY.

CAUTION: WHEN USING THE CAMERA IN LIGHTNING CONDITIONS, BE SURE TO INSTALL A SURGE – PROTECTION DEVICE, OR DISCONNECT POWER SUPPLY PLUG AND CABLE.

CAUTION: IN ORDER TO CAPTURE HIGH QUALITY PICTURES, THE POWER SUPPLY’S CABLE AND VIDEO OUTPUT CABLE SHOULD NOT BE TOO LONG.

IN THE BOX

- (1) RET1024 Vandal Proof Outdoor Camera
- (1) User Manual

PRODUCT OVERVIEW

Sensor (CCD)

SONY 1/3” High Resolution CCD Sensor

Auto Gain Control (AGC)

Built-in auto gain control (AGC) circuit.

Auto-Electronic Shutter (AES)

Built-in auto electronic shutter function. The color camera’s AES speed can reach 1/1000,000.

Gama Characteristic

Camera Gama characteristic is 0.45.


Scanning Mode

NTSC or PAL mode.

Night-time Vision

N/A

CONNECTIONS

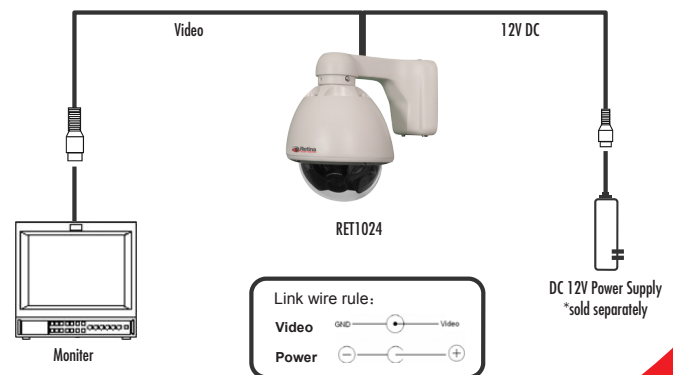

USER MANUAL



RET1024

Retina Vandal Proof Outdoor Camera
with SONY High Resolution CCD Sensor



SPECIFICATIONS

Model	RET1024
Pick Up Element	SONY 1/3" CCD
Effective Picture Elements (H*V)	NTSC: 510x492 PAL: 500x582
Horizontal Resolution	420 TV Lines
S/N Ratio	>45dB
Clock Frequency (MHz)	NTSC: 19.0699 PAL: 18.9375
Scanning System	2:1 Interface
Minimum Illumination	0.01 Lux
Synchronous System	Internal, Negative sync.
Auto Electronic Shutter	NTSC: 1/60~1/100,000 PAL: 1/50~1/100,000
Gama Characteristic	0.45
IR Distance	N/A
IR Status	N/A
IR Power On	N/A
Video Output	1 Vpp, 75 Ohm
Auto Gain Control	Auto
Power/Current	12V DC (±10%) / 500mA
Lens	4-9mm Manual Zoom (optional)
Water Resistance	IP66
Dimensions	ø138 x 212(H) mm
Weight	5.5 lbs
Storage Temperature	-30~+60°C RH 95% Max
Operating Temperature	-10~+50°C RH 95% Max

LIMITED WARRANTY

This warranty remains in effect for one year from the date of purchase. Except as specified below, this warranty covers all defects in material and workmanship. The following are not covered: Damaged caused by accident, misuse, abuse, product modification or neglect, damage occurring during shipment, damage from failure to follow instructions contained in the owner's instruction booklet, damage resulting from the performance of repairs by someone not authorized by Retina Security Equipment, or any claims based on misrepresentations by the seller. This warranty does not cover incidental or consequential damages. It does not cover the cost of removing or reinstalling the unit. This warranty is void if the serial number has been removed or defaced.

This warranty gives you specific legal rights. You may also have other rights which vary from state to state. Some states do not allow the exclusion or limitations of incidental or consequential damages or limitation on how long an implied warranty lasts so the above may not apply to you.

HOW TO OBTAIN SERVICE

Please call us at (800) 844-9555 Monday – Friday 8am – 5pm. Central Standard Time. We may direct you to an authorized dealer/technician or request that you return the product for repair. You must present the original bill of sale to establish the date of purchase.

Please do not ship your product to us for repair without prior authorization. You are responsible for transportation of your product and payment of any shipping charges. If the repairs are covered under warranty, we will pay the return shipping charges.

NOTE: Do not attempt to disassemble the camera. Doing so may void your warranty. No user-serviceable parts inside.

TROUBLESHOOTING

- No picture after providing power.**
Possible power supply voltage abnormality. Check for proper power supply voltage and polarity. Ensure that all the connecting cables and monitors are hooked up properly.
- Interference (hum bars) are moving through the picture.**
Check the monitor and peripheral equipment used.
- The picture background changes color continuously.**
The fluorescent light's electromagnetic field can cause color roll. This is a normal phenomenon. Reduce the number of fluorescent lights, or increase the distance between the camera and the fluorescent lights.
- The picture quality is poor or "fuzzy"**
This is usually due to poor quality cables or poor connections. Ensure that all the connecting cables and monitors are hooked up properly, or switch to higher quality connecting cables.



USER MANUAL